

SASSO 100 square downlight

trim 2 lamps

048-2710614M 048-279931G 002-90774



Project / Type _____

Notes _____

Count / Date _____



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤ 16

cd/m²
≤ 3000

CRI
≥ 90

X-PERT

General

Ceiling , Recessed

matt silver

Mounting set white aluminium

front IP44 , back IP20

4220 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 97 , R_f: 90 , R₍₁₋₁₅₎: 89

MR 0.81

MDER 0.74

Optical

medium

beam angle 33°x34°

UGR < 16 , ≥ 65° < 3000 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrical

non DIM

58 W

inset 24.8 W

36 V_f

700 mA

total insets 50 W

PC2 220-240V

73 lm/W

inset 85 lm/W

Physical

trim

length 218 mm

width 118 mm

height 75 mm

0.55 kg

Cutout

length 210 mm

width 112 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

¹ Value of containing product at full load (undimmed)

Light distribution



Product drawing

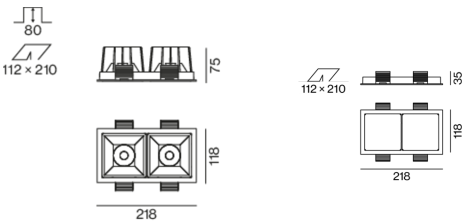

Installation instructions



Lighting calculator



[048-2710614M 048-279931G 002-90774] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com