

# SASSO 100 square downlight

trim

048-2710611S 048-279731G 002-90777



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed \_\_\_\_\_

black , RAL9005 <sup>1</sup> \_\_\_\_\_

Mounting set white aluminium \_\_\_\_\_

front IP44 , back IP20 \_\_\_\_\_

1510 lm \_\_\_\_\_

## LED

4000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 97 , R<sub>f</sub>: 90 , R<sub>t(1-15)</sub>: 89 \_\_\_\_\_

MR 0.81 \_\_\_\_\_

MDER 0.74 \_\_\_\_\_

## Optical

spot \_\_\_\_\_

beam angle 19° \_\_\_\_\_

UGR < 13 , ≥ 65° < 3000 cd/m² \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

## Electrical

non DIM \_\_\_\_\_

20.2 W \_\_\_\_\_

inset 17.2 W \_\_\_\_\_

36 Vf \_\_\_\_\_

500 mA \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

75 lm/W \_\_\_\_\_

inset 88 lm/W \_\_\_\_\_

## Physical

trim \_\_\_\_\_

length 118 mm \_\_\_\_\_

width 118 mm \_\_\_\_\_

height 75 mm \_\_\_\_\_

0.51 kg \_\_\_\_\_

## Cutout

length 112 mm \_\_\_\_\_

width 112 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_


max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 80 mm \_\_\_\_\_


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

Recessed square spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 19° beam; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

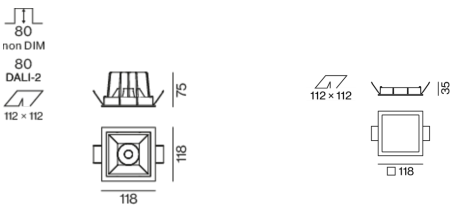

## Installation instructions



## Lighting calculator

