

# SASSO 100 square downlight

trim

048-2710514W 048-279731G 002-90774



Project / Type


Notes

Count / Date




Recessed square spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 65° beam; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

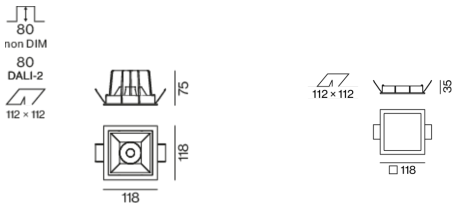

↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤22

cd/m²  
≤1500

CRI  
≥90

X-PERT

## General

Ceiling , Recessed

matt silver

Mounting set white aluminium

front IP44 , back IP20

2290 lm

## LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 88

MR 0.59

MDER 0.53

## Optical

wide flood

beam angle 65°

≥65° <1500 cd/m²

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

## Electrical

non DIM

29.2 W

inset 24.8 W

36 Vf

700 mA

PC2 220-240V

78 lm/W

inset 92 lm/W

## Physical

trim

length 118 mm

width 118 mm

height 75 mm

0.49 kg

## Cutout

length 112 mm

width 112 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 80 mm

<sup>1</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

