

SASSO 100 round downlight

trim

048-2700511S 048-279631G 002-90776



Project / Type

Notes

Count / Date



↑ P20
↓ P44

220-240V

X-PERT

UGR
≤13

cd/m²
≤3000

CRI
≥90

LAGER

X-PERT

General

Ceiling , Recessed

black , RAL9005 ¹

Mounting set white aluminium

front IP44 , back IP20

1830 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 100 , R_f: 91 , R_{f(1-15)}: 88

MR 0.59

MDER 0.53

Optical

spot

beam angle 19°

UGR < 13 , ≥65° <3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

29.2 W

inset 24.8 W

36 Vf

700 mA

PC2 220-240V

63 lm/W

inset 74 lm/W

1 DALI Addr.

Physical

trim

diameter 118 mm

height 75 mm

0.49 kg

Cutout

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


¹ RAL code ² Value of containing product at full load (undimmed)

Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 19° beam; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

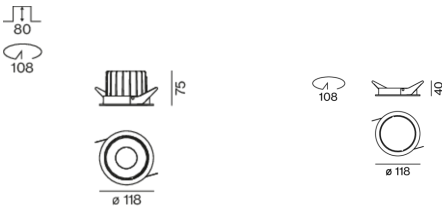

Installation instructions



Lighting calculator

