

# SASSO 60 square wallwasher

trim 2 lamps

048-2651411A 048-2699317 002-90762



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

black , RAL9005 <sup>1</sup>

Mounting set traffic white

IP20

1340 lm

## LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 90

MR 0.53

MDER 0.48

## Optical

wallwasher

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2

220-240 V

system 19.4 W

inset 8.3 W

27 Vf

300 mA

total insets 16.5 W

PC2

system 69 lm/W<sup>3</sup>

inset 81 lm/W<sup>3</sup>

1 DALI Addr.

## Physical

trim

length 147 mm

width 81 mm

height 48 mm

0.21 kg

## Cutout

length 138 mm

width 73 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

Recessed square spotlight in die-cast aluminium; 2 lamps; surface black; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

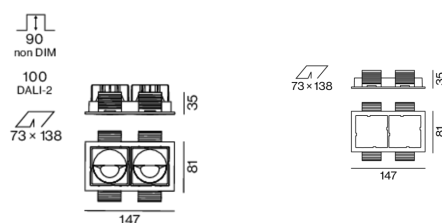

[048-2651411A 048-2699317 002-90762] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

30.01.2025

1 / 2

# SASSO 60 square wallwasher

trim 2 lamps

048-2651411A 048-2699317 002-90762



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

