

SASSO PRO 100

adjustable flush trim square

048-2412417W 052-1942417



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
white , RAL 9016 ¹	
Mounting set traffic white	
IP20	
2070 lm	

LED

2700 K	
CRI ≥ 90	
L85 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 100 , R _f : 89 , R ₍₁₋₁₅₎ : 86	
MR 0.49	
MDER 0.44	

Optical

wide flood	
beam angle 57°	
P _{stLM} ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

non DIM	
220-240 V	
system 27.0 W	
system 77 lm/W ³	
PC2	

Physical

trim	
length 112 mm	
width 112 mm	
height 106 mm	
0.62 kg	

Cutout


diameter 108 mm	
min. ceiling thickness 5 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

Round recessed spotlight in die-cast aluminium; surface white powder coated; 360° rotatable and 35° tiltale; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for ceiling thickness of 5-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 57° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

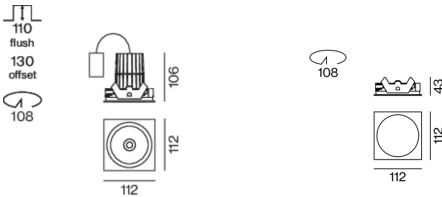

Installation instructions



Lighting calculator

