

SASSO PRO 100

adjustable flush trim round

048-2410538W 052-1922447



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 35°

rotation 360°

black , RAL 9005 ¹

Mounting set traffic white

IP20

1300 lm

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 100 , R_f: 89 , R₍₁₋₁₅₎: 89

MR 0.56

MDER 0.51

Optical

wide flood

beam angle 57°

UGR ≤ 19 , ≥65° <3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

220-240 V

system 14.7 W

system 88 lm/W³

PC2

1 DALI Addr.

Physical

trim

diameter 112 mm

height 106 mm

0.6 kg

Cutout

diameter 108 mm

min. ceiling thickness 5 mm


max. ceiling thickness 25 mm

recessed depth 110 mm


¹ RAL code ² Value of containing product at full load (undimmed)

³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



Product drawing

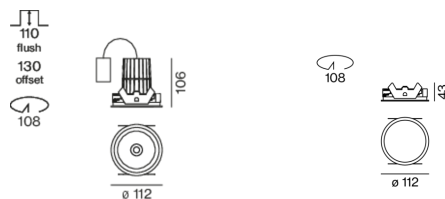

Installation instructions



Lighting calculator



SASSO PRO 100

adjustable flush trim round

048-2410538W 052-1922447



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|--------|---------------------------------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.92 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | | Room Surface Maintenance Factor |
| MF | Maintenance Factor | | LLMF | | Lamp Lumens Maintenance Factor |
| LMF ^a | Luminaire Maintenance Factor | | LSF | | Lamp Survival Faktor |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 18 |
| B16 | 30 |
| C10 | 23 |
| C16 | 36 |

Components

MOUNTING SET

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|-------------|---------------|--------|-------------------|
| round flush | traffic white | 112 | 052-1922447 |



Mounting accessories

THROUGH WIRING CONNECTION BOX

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------------------------------------|------------|-------------------|
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2531110 |
| DALI cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2551110 |



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| L-W-H (MM) | ARTICLE NUMBER(S) |
|-------------|-------------------|
| 240-400-130 | 052-1914420 |



SASSO PRO 100

adjustable flush trim round

048-2410538W 052-1922447



Project / Type

Notes

Count / Date

Optical accessories

HONEYCOMB LOUVER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191317 |
| jet black | 74 | 048-2191318 |



LINEAR PRISMATIC LENS

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2192317 |
| jet black | 74 | 048-2192318 |



SNOOT

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191117 |
| jet black | 74 | 048-2191118 |



SNOOT WITH HONEYCOMB LOUVER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191217 |
| jet black | 74 | 048-2191218 |

