

# SPIO 20 wallwasher/floor

trimless

048-17305108W 048-1698107 002-90787



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

rotation 360°

white , RAL 9016 <sup>1</sup>

traffic white

IP20

409 lm

fixture 69 lm/W<sup>2</sup>

### LED

3000 K

CRI ≥ 90

L95 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 104 , R<sub>f</sub>: 91 , R<sub>f(1-5)</sub>: 92

MR 0.59

MDER 0.54

### Optical

wallwasher floor

beam angle 52°

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

### Electrical

non DIM

220-240 V

system 7.9 W

fixture 5.9 W

5.6 Vf

1050 mA

PC2

### Physical

trimless

diameter 26 mm

height 51 mm

### Cutout


diameter 48 mm

min. ceiling thickness 9 mm


max. ceiling thickness 25 mm

recessed depth 80 mm

### Light distribution



### Product drawing

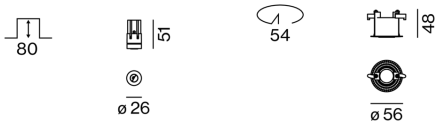

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)

### Installation instructions



### Lighting calculator

