

FRAME 60 high lumen

trim


052-47M313GH



Project / Type

Notes

Count / Date

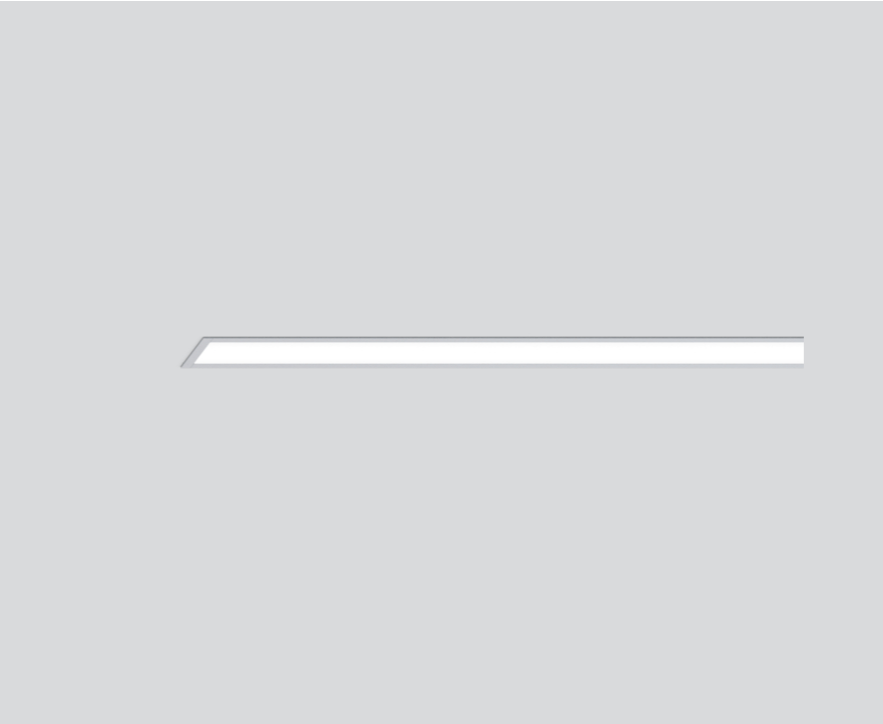

RG0

IEC 62471

220-240V

X-PERT

X-PERT

General

Ceiling , Recessed

grey , RAL9006 ¹

2210 lm/m

IP20

1930 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_f: 92 , R₍₁₋₁₅₎: 90

MR 0.81

MDER 0.74

Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 17.5 W

PC1 220-240V

system 110 lm/W³

1 DALI Addr.

20 W/m

Physical

trim

length 893 mm

width 77 mm

height 78 mm

2.34 kg

Cutout

length 893 mm

width 66 mm


min. ceiling thickness 8 mm

max. ceiling thickness 25 mm


recessed depth 104 mm

Luminaire housing made of extruded aluminium profile; recessed light with wrap around edge; suitable for ceiling thickness of 8-25 mm; surface grey powder coated; lighting profile (end cover and mounting bracket pre-assembled) available in advance for installation; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; HPO (High Performance Opal) cover for uniform illumination; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions

Lighting calculator

