

MINO 60 high lumen

suspended


046-4235D3GG



Project / Type

Notes

Count / Date

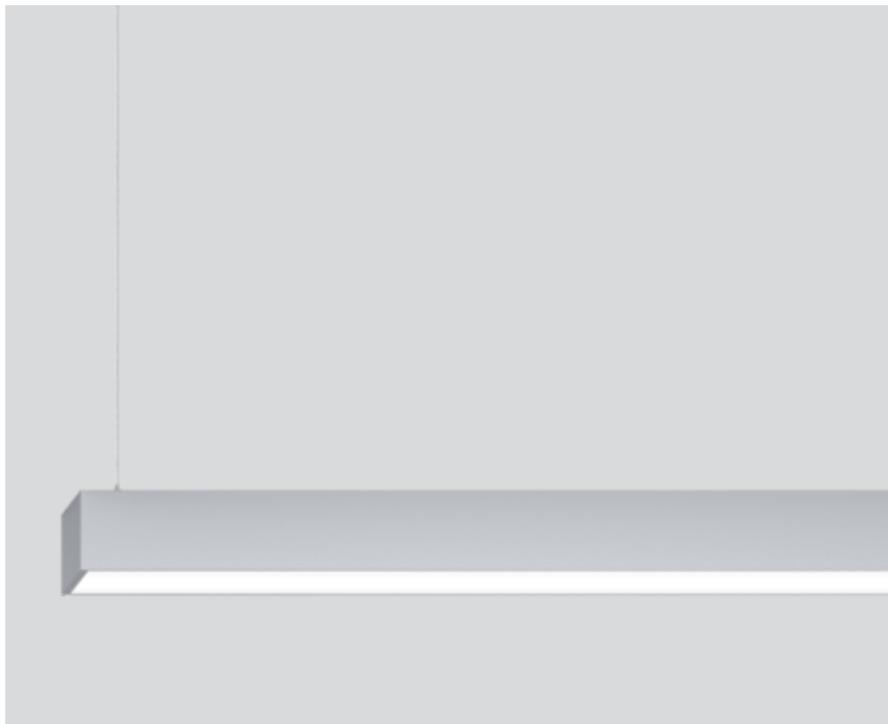

General

Ceiling , Suspended

grey , RAL 9006 ¹

IP20

3270 lm

2220 lm/m

LED

tunable white

2700 K - 6500 K

CRI \geq 80

L90 / 50000 h

initial MacAdam \leq 3 SDCM

MR 0.48

MDER 0.44

Optical

Microprismatic

microprismatic

PstLM \leq 1.0 ²

SVM \leq 0.4 ²

Electrical

DALI-2 DT8

220-240 V

system 31 W

system 105 lm/W³

PC1

1 DALI Addr.

21 W/m

Physical

cabl 1500 mm

length 1480 mm


width 60 mm

height 80 mm


4.3 kg

Luminaire housing made of extruded aluminium profile; light tight final end caps made of aluminium; no visible screws; angular design; surface grey powder coated; suspended luminaire with 1500mm cable suspension; with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; freely positionable; incl. feed (white); lighting profile (end cover pre-assembled) available in advance for installation; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour: tunable white diodes (2700-6500 K); binning initial MacAdam \leq 3 SDCM; CRI \geq 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 / DT8 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)

³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

