

# TILA 22 suspended


MOVE IT 10  
030-6640634M



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

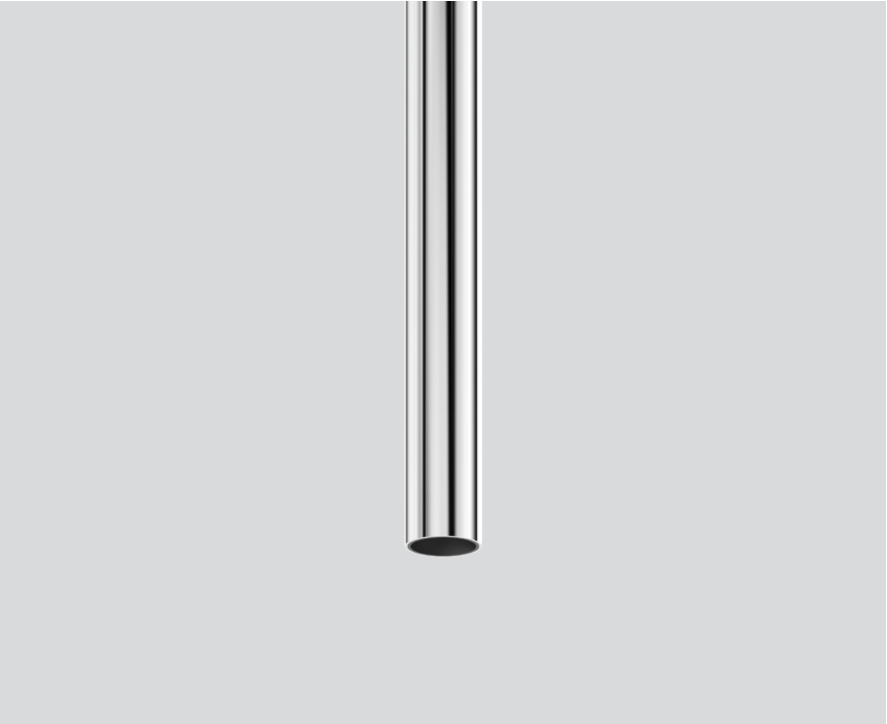

Decorative pendant light inset made of aluminium; surface polished chrome; light inset can be installed and moved without tools by means of clip mount; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; high quality reflector; precise radiation characteristic with 26° beam; no multiple shadows; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC3; DALI-2 control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional;

**General**

Ceiling , Track Suspended \_\_\_\_\_

chrome \_\_\_\_\_

IP20 \_\_\_\_\_

359 lm \_\_\_\_\_

**LED**

4000 K \_\_\_\_\_

CRI  $\geq 90$  \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam  $\leq 3$  SDCM \_\_\_\_\_

R<sub>g</sub>: 97 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 89 \_\_\_\_\_

MR 0.81 \_\_\_\_\_

MDER 0.74 \_\_\_\_\_

**Optical**

medium \_\_\_\_\_

beam angle 26° \_\_\_\_\_

**Electrical**

DALI-2 \_\_\_\_\_

5.7 W \_\_\_\_\_

PC3 \_\_\_\_\_

63 lm/W \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_


**Physical**

diameter 22 mm \_\_\_\_\_

height 300 mm \_\_\_\_\_


1500 mm \_\_\_\_\_

## Light distribution



medium 26°		
h (m)	E0° (lx)	ø (m)
1	1740	0.46
2	440	0.92
3	190	1.37
4	110	1.83
5	70	2.29

## Product drawing



## Lighting calculator

