

TILA 22 suspended


MOVE IT 10
030-6640634M



Project / Type _____

Notes _____

Count / Date _____

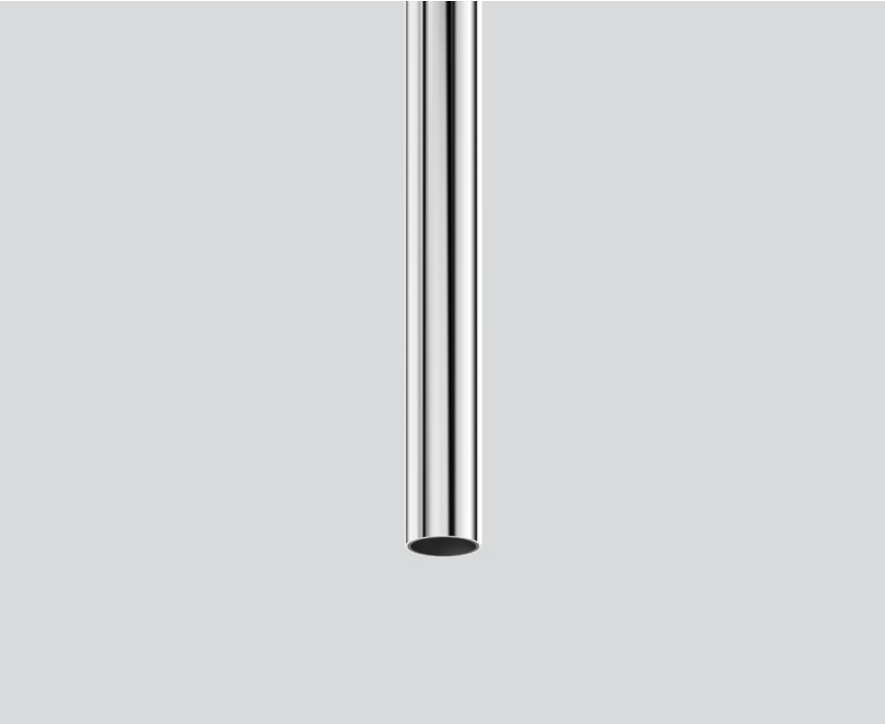

Decorative pendant light inset made of aluminium; surface polished chrome; light inset can be installed and moved without tools by means of clip mount; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; high quality reflector; precise radiation characteristic with 26° beam; no multiple shadows; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC3; DALI-2 control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional;

III

X-PERT

UGR ≤ 10

CRI ≥ 90

DALI 1ADDR

General

Ceiling , Track Suspended _____

chrome _____

IP20 _____

359 lm _____

LED

4000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 97 , R_f: 90 , R₍₁₋₁₅₎: 89 _____

MR 0.81 _____

MDER 0.74 _____

Optical

medium _____

beam angle 26° _____

Electrical

DALI-2 _____

5.7 W _____

PC3 _____

63 lm/W _____

1 DALI Addr. _____


Physical

diameter 22 mm _____

height 300 mm _____

1500 mm _____

Light distribution



TILA 22 suspended

MOVE IT 10
030-6640634M



Project / Type

Notes

Count / Date

Mounting accessories

HOOK

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	16	030-1000017
jet black	16	030-1000018



Optical accessories

HONEYCOMB LOUVER

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
jet black	20	007-1965118

