

TILA 22 suspended

MOVE IT 10

030-6640639F



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Track Suspended _____

rose gold _____

IP20 _____

385 lm _____

LED

4000 K _____

CRI \geq 90 _____

L80 / 50000 h _____

initial MacAdam \leq 3 SDCM _____

R_g: 97 , R_r: 90 , R₍₁₋₁₅₎: 89 _____

MR 0.81 _____

MDER 0.74 _____

Optical

flood _____

beam angle 43° _____

P_{stLM} \leq 1.0 ¹ _____

SVM \leq 0.4 ¹ _____

Electrical

DALI-2 _____

system 5.7 W _____

PC3 _____

system 68 lm/W² _____


1 DALI Addr. _____

Physical

diameter 22 mm _____


height 300 mm _____

1500 mm _____

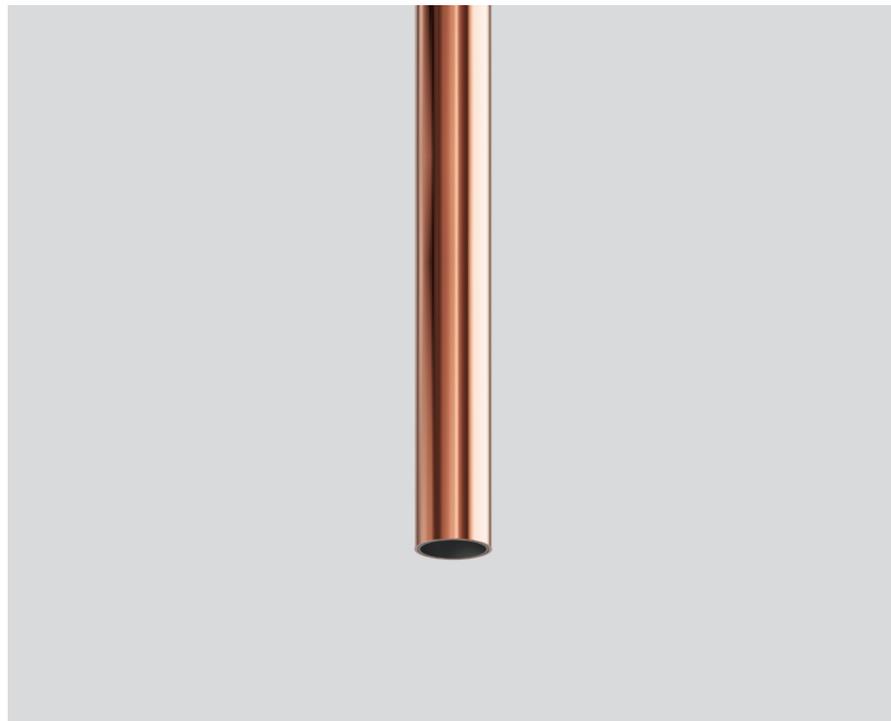

Decorative pendant light inset made of aluminium; surface anodised rose gold; light inset can be installed and moved without tools by means of clip mount; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; light colour 4000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; high quality reflector; precise radiation characteristic with 43° beam; no multiple shadows; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC3; DALI-2 control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional;


Light distribution



flood 43°

h (m)	E0° (lx)	ø (m)
1	748	0.80
2	187	1.59
3	83	2.39
4	47	3.19
5	30	3.98

Product drawing



¹ Value of containing product at full load (undimmed)

² incl. optical losses and the efficiency of the operating device (converter)

Lighting calculator

