

MINO 40 reflector

ceiling / suspended system


042-0114137B 042-100401W



Project / Type

Notes

Count / Date

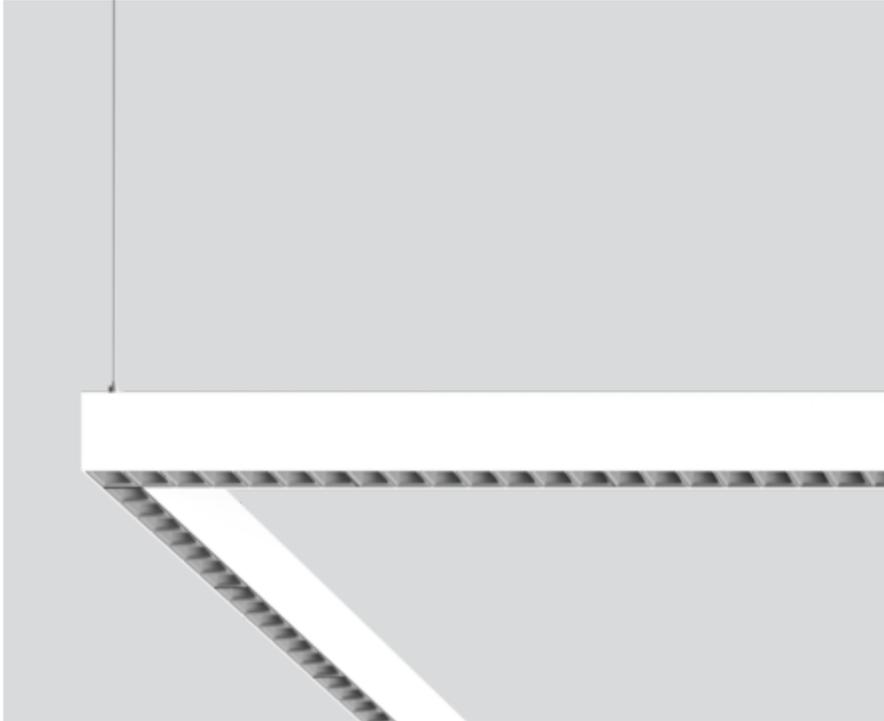

General

Ceiling , Suspended

RAL Traffic white , RAL 9016 ¹

Reflector dark chrome

IP20

4870 lm

2430 lm/m

LED

4000 K

CRI \geq 90

L90 / 50000 h

initial MacAdam \leq 3 SDCM

R_g: 99 , R_f: 92 , R_{t(1-15)}: 90

MR 0.81

MDER 0.74

Optical

Reflector

symmetric

UGR < 19 , $\geq 65^\circ$ <1500 cd/m²

P_{stLM} \leq 1.0 ²

SVM \leq 0.4 ²

Electrical

DALI-2

220-240 V

system 48 W

system 101 lm/W³

PC1

1 DALI Addr.

24 W/m

Physical

length 2000 mm


width 40 mm

height 65 mm

5.5 kg

Luminaire housing made of extruded aluminium profile; angular design; for continuous lighting systems; light tight final end caps made of aluminium (available as an accessory); no visible screws; surface traffic white powder coated; same RAL colour as spotlight modules; for ceiling surface mounting or suspended mounting (1500 mm cable suspension as an accessory); height adjustment without tools; luminaire profile can be pre-mounted; pre-assembled power rail for power supply in luminaire profile; voltage tap of the light inset on the power rail; remaining lamp components mounted without tools; LED light inset incl. high gloss reflector with faceted design; Reflector dark chrome; light colour 4000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; UGR \leq 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° \leq 1500 cd/m²; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator



MINO 40 reflector

ceiling / suspended system

042-0114137B 042-100401W



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.92 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |

| | | | |
|------------------|------------------------------|-------------------|---------------------------------|
| MF | LMF × RSMF × LLMF × LSF | RSMF ^a | Room Surface Maintenance Factor |
| MF | Maintenance Factor | LLMF | Lamp Lumens Maintenance Factor |
| LMF ^a | Luminaire Maintenance Factor | LSF | Lamp Survival Faktor |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 13 |
| B13 | 17 |
| B16 | 21 |
| B20 | 27 |
| C10 | 21 |
| C13 | 28 |
| C16 | 35 |
| C20 | 45 |

Components

INSTALLATION CHANNEL

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------|------------|-------------------|
| traffic white | 2000-40-65 | 042-100401W |



Mounting accessories

END CAPS

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------|-----------------|------------|-------------------|
| 1 pair | pure white | 65-40-4 | 042-1090017 |
| 1 pair | jet black | 65-40-4 | 042-1090018 |
| 1 pair | white aluminium | 65-40-4 | 042-109001G |
| 1 pair | special colours | 65-40-4 | 042-109001X |
| 1 pair | traffic white | 65-40-4 | 042-109001W |



Mounting accessories

LINEAR CONNECTOR

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------------------------|-----------|------------|-------------------|
| mechanical | jet black | 120-36-14 | 042-7091110 |
| mechanical & electrical | jet black | 120-36-14 | 042-7091230 |



OPAL COVER LINEAR CONNECTOR

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|------------|-------------------|
| pure white | 120-36-14 | 042-1091910 |



MICROPRISMATIC COVER LINEAR CONNECTOR

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|------------|-------------------|
| pure white | 120-36-14 | 042-1091810 |



[042-0114137B 042-100401W] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

06.04.2025

2 / 3

MINO 40 reflector

ceiling / suspended system

042-0114137B 042-100401W



Project / Type

Notes

Count / Date

Mounting accessories

CEILING FASTENER

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------|------------|-------------------|
| traffic white | 67-31-8 | 050-2041117 |
| jet black | 67-31-8 | 050-2041118 |



CABLE SUSPENSION

| COLOUR | ARTICLE NUMBER(S) |
|--------|-------------------|
| chrome | 005-2152110 |



CANOPY

| COLOUR | ARTICLE NUMBER(S) |
|---------------|-------------------|
| traffic white | 005-2311217 |
| jet black | 005-2311218 |



Electrical accessories

POWER FEEDER UNIT

| L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|-------------------|
| 80-36-17 | 042-1093230 |



Electrical accessories

FEEDER CABLE

| COLOUR | ARTICLE NUMBER(S) |
|------------|-------------------|
| pure white | 005-2412417 |
| jet black | 005-2412418 |

Optical accessories

BLIND COVER

| TYPE | COLOUR | ARTICLE NUMBER(S) |
|---------|-----------------|-------------------|
| 1000 mm | traffic white | 006-4210017B |
| 1000 mm | jet black | 006-4210018B |
| 1000 mm | white aluminium | 006-421001GB |
| 2000 mm | traffic white | 006-4220017B |
| 2000 mm | jet black | 006-4220018B |
| 2000 mm | white aluminium | 006-422001GB |
| 3000 mm | traffic white | 006-4230017B |
| 3000 mm | jet black | 006-4230018B |
| 3000 mm | white aluminium | 006-423001GB |
| 1000 mm | special colours | 006-421001XB |
| 2000 mm | special colours | 006-422001XB |
| 3000 mm | special colours | 006-423001XB |



CONTINUOUS LINEAR COVER

| TYPE | ARTICLE NUMBER(S) |
|----------|-------------------|
| 25000 mm | 006-2225010H |
| 6000 mm | 006-2206010H |



[042-0114137B 042-100401W] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

06.04.2025