

# TWIST 100 trim 2 lamps

048-1121117M 048-2798317 002-90789



Project / Type


Notes

Count / Date



Round recessed spotlight in die-cast aluminium; 2 lamps; surface white powder coated; installation without tools in mounting set due to patented ball catch system; with trim traffic white; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 27° beam; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


## Light distribution



medium 27°

h (m)	E0° (lx)	ø (m)
1	10300	0.49
2	2600	0.97
3	1100	1.46
4	600	1.95
5	400	2.43

## Product drawing

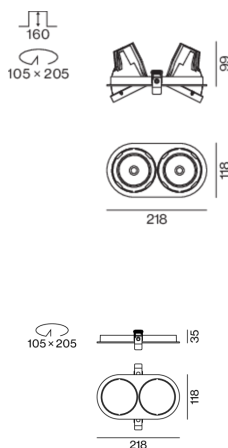

## General

Ceiling , Recessed

tilt max 45°

rotation 360°

white , RAL 9016 <sup>1</sup>

Mounting set traffic white

front IP20 , back IP20

6400 lm

fixture 141 lm/W<sup>2</sup>

## LED

4000 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 2$  SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 92 , R<sub>f(1-15)</sub>: 91

MR 0.78

MDER 0.71

## Optical

medium

beam angle 27°

PstLM  $\leq 1.0$  <sup>3</sup>

SVM  $\leq 0.4$  <sup>3</sup>

## Electrical

DALI-2

220-240 V

system 51 W

fixture 22.7 W

650 mA

fixture 45 W

PC2

1 DALI Addr.

## Physical

length 218 mm

width 118 mm

height 99 mm

0.6 kg

## Cutout

diameter 105 mm

length 205 mm

width 105 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 160 mm

<sup>1</sup> RAL code

<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

<sup>3</sup> Value of containing product at full load (undimmed)

# TWIST 100 trim 2 lamps

048-1121117M 048-2798317 002-90789



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

