

TWIST 100 trim 2 lamps

048-1121117F 048-2798318 002-90789



Project / Type


Notes

Count / Date



Round recessed spotlight in die-cast aluminium; 2 lamps; surface white powder coated; installation without tools in mounting set due to patented ball catch system; with trim jet black; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 45° tiltable outward; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 39° beam; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



flood 39°

h (m)	E0° (lx)	ø (m)
1	6490	0.70
2	1620	1.40
3	720	2.10
4	410	2.80
5	260	3.50

Product drawing

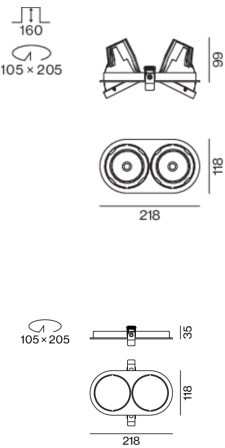

General

Ceiling , Recessed

tilt max 45°

rotation 360°

white , RAL 9016 ¹

Mounting set jet black

front IP20 , back IP20

6320 lm

fixture 139 lm/W²

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 100 , R_f: 92 , R_{f(-15)}: 91

MR 0.78

MDER 0.71

Optical

flood

beam angle 39°

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

DALI-2

220-240 V

system 51 W

fixture 22.7 W

650 mA

fixture 45 W

PC2

1 DALI Addr.

Physical

length 218 mm

width 118 mm

height 99 mm

0.6 kg

Cutout

diameter 105 mm

length 205 mm

width 105 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 160 mm

¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
³ Value of containing product at full load (undimmed)



TWIST 100 trim 2 lamps

048-1121117F 048-2798318 002-90789



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

