

# MINO 60 high lumen

ceiling / suspended system


007-93M5137 006-16152H 046-4005018



Project / Type

Notes

Count / Date

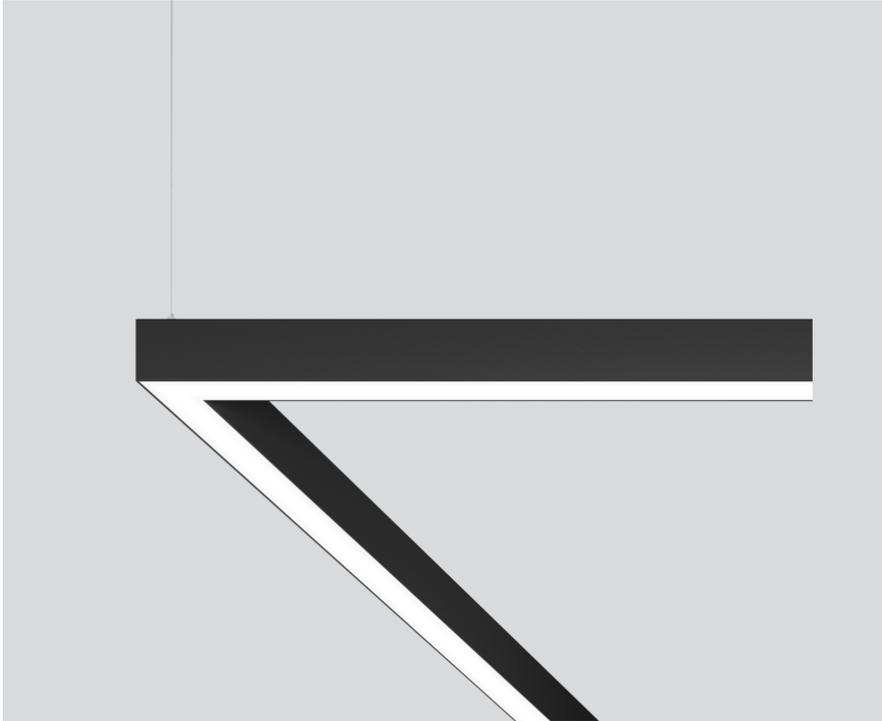

## General

Ceiling , Suspended

black , RAL9005 <sup>1</sup>

2190 lm/m

IP20

3220 lm

## LED

4000 K

CRI ≥ 90

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 92 , R<sub>(1-15)</sub>: 90

MR 0.81

MDER 0.74

## Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2

29.1 W

PC1 220-240V

111 lm/W

1 DALI Addr.

20 W/m

## Physical

trim

length 1472 mm

width 60 mm


height 80 mm

3.5 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

Luminaire housing made of extruded aluminium profile; angular design; for continuous lighting systems; light tight final end caps made of aluminium (available as an accessory); no visible screws; surface black powder coated; for ceiling surface mounting or suspended mounting (1500 mm cable suspension as an accessory); with integrated tool-less suspension height adjustment; spring clip attachment to the luminaire; freely positionable; luminaire profile for mounting available in advance; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; HPO (High Performance Opal) cover for uniform illumination; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator



# MINO 60 high lumen

ceiling / suspended system

007-93M5137 006-16152H 046-4005018



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	7
B13	10
B16	12
B20	14
C10	10
C13	20
C16	24
C20	28

## Components

### LIGHT OPTIC COVER

TYPE	ARTICLE NUMBER(S)
opal high performance	006-16152H

### INSTALLATION CHANNEL

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
1472 mm	jet black	1472-60-80	046-4005018

## Mounting accessories

### END CAPS

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
1 pair	traffic white	60-40-4	046-5010017
1 pair	jet black	60-40-4	046-5010018
1 pair	white aluminium	60-40-4	046-501001G
1 pair	special colours	60-40-4	046-501001X

## Mounting accessories

### LINEAR CONNECTOR

TYPE	ARTICLE NUMBER(S)
1 piece	005-40046
10 pieces	005-40046.10

### OPAL COVER LINEAR CONNECTOR

ARTICLE NUMBER(S)
006-14000



[007-93M5137 006-16152H 046-4005018] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

02.10.2024

2 / 3

# MINO 60 high lumen

ceiling / suspended system

007-93M5137 006-16152H 046-4005018



Project / Type

Notes

Count / Date

## Mounting accessories

### CEILING CLIP

COLOUR  
transparent

ARTICLE NUMBER(S)  
034-11636



## Mounting accessories

### CABLE SUSPENSION

ARTICLE NUMBER(S)  
005-2122110



### CABLE RAIL

Ø (MM)  
1200

ARTICLE NUMBER(S)  
005-2491110



## Electrical accessories

### THROUGH WIRE

TYPE  
3 x 1,5 mm<sup>2</sup> | 10 pieces  
5 x 1,5 mm<sup>2</sup> | 10 pieces

ARTICLE NUMBER(S)  
004-90003  
004-90005



## Electrical accessories

### CANOPY / FEEDER CABLE

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
3 x 1,5 mm <sup>2</sup>	traffic white	90-90-22	005-2212317
3 x 1,5 mm <sup>2</sup>	jet black	90-90-22	005-2212318
5 x 1,5 mm <sup>2</sup>	pure white	90-90-22	005-2212417
5 x 1,5 mm <sup>2</sup>	jet black	90-90-22	005-2212418

