

ARY cable suspended 3 lamps

MOVE IT PRO


086-732003X8F



Project / Type

Notes

Count / Date

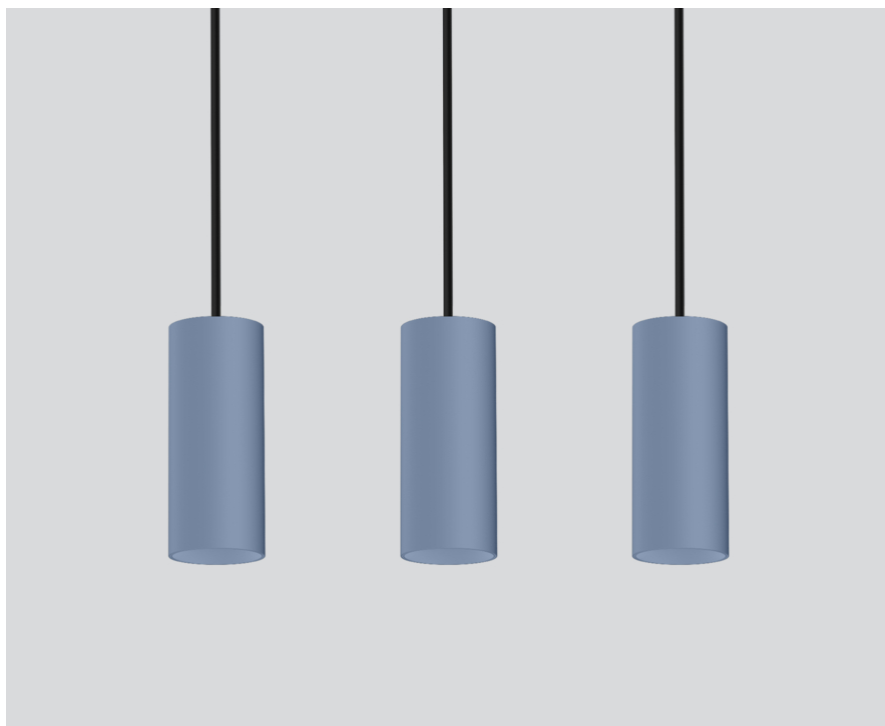

General

Ceiling , Track Suspended

special colours

Converter Jet Black

IP20

3270 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 98 , R_r: 91 , R_{t(1-15)}: 89

MR 0.62

MDER 0.56

Optical

flood

beam angle 44°

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrical

DALI-2

system 41 W

PC2 220-240V

system 80 lm/W²

1 DALI Addr.

Physical

cable 2000 mm


diameter 47 mm

height 110 mm

adapter 402 mm

Decorative pendant light inset made of aluminium; 3 lamps; cylindrical spotlight heads; surface special colours powder coated; light inset, incl. high power adapter + converter can be installed flexibly and without tools; power supplied via MOVE IT PRO system track profile; pendant fitting with 2000mm suspension, incl. feed (special colours), can be individually shortened; shades available as accessory in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; accessories are listed separately; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 44° beam; degree of protection IP20; PC2 220-240V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



flood 44° combined

h (m)	E0° (lx)	ø (m)
1	6060	0.82
2	1520	1.64
3	670	2.45
4	380	3.27
5	240	4.09

Product drawing



¹ Value of containing product at full load (undimmed)

² incl. optical losses and the efficiency of the operating device (converter)

Installation instructions

