

# MOVE IT 25 / 45

## ACOUSTIC square grid

inlay


050-231121S



Project / Type


Notes

Count / Date

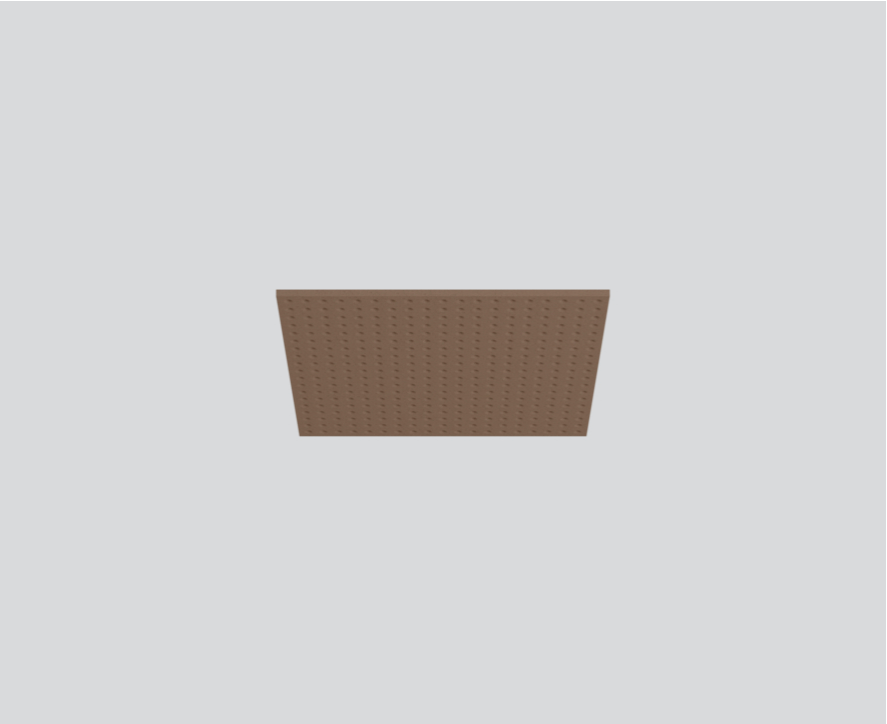

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50% post-consumer recycled PET; square design; high quality visual and tactile surface with embossed pattern, limestone; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25 / 45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools;

### Product drawing



**General**

Luminaire / Track , Mounted

limestone

**Physical**

panel only for NODE connector + track 1210 mm

length 1235 mm

width 1235 mm

height 25 mm

2.2 kg

**Acoustics**

Alpha w ( $\alpha_w$ ) up to 1

SAC (sound absorption class) up to A

NRC up to 1.3

SAA up to 1.32

Acoustic data calculations based on MOVE IT 25/45 acoustic square grid inlay, cavity 40cm





Project / Type

Notes

Count / Date

Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.73	1.47	1.73	2.2	2.67	2.77

Sound absorption coefficient ( $\alpha_p$ )

