

# SASSO 60 square downlight

semi-recessed


048-30010117F 002-90742



Project / Type

Notes

Count / Date

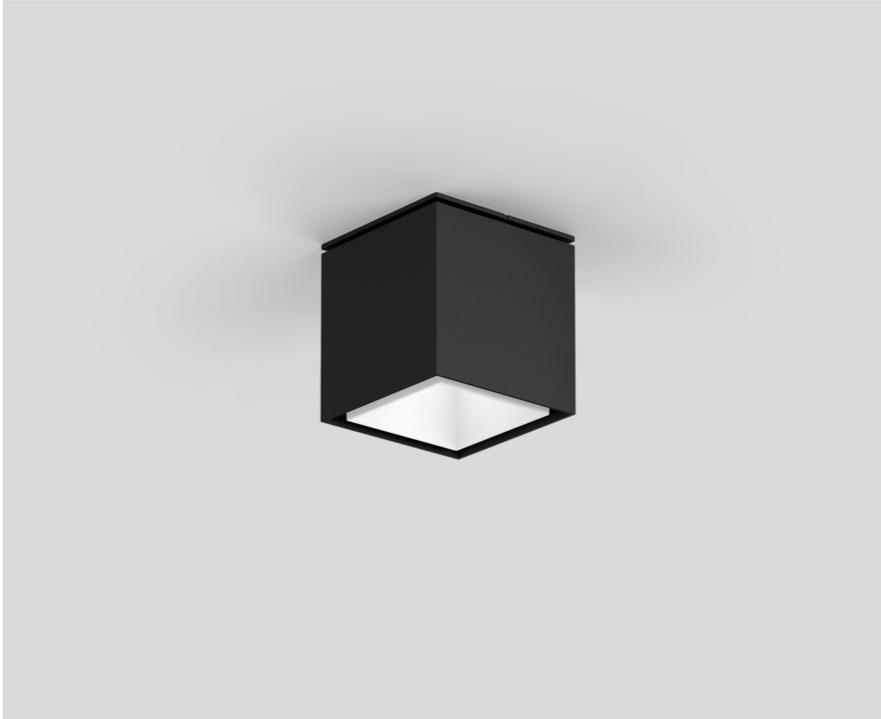

## General

Ceiling , Semi-Recessed

black , RAL9005/white <sup>1</sup>

Inner colour white

front IP40 , back IP20

926 lm

## LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 87

MR 0.6

MDER 0.54

## Optical

flood

beam angle 44°

UGR < 19

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM

system 10.2 W

inset 8.7 W

36 Vf

250 mA

PC2 220-240V

system 91 lm/W<sup>3</sup>

inset 107 lm/W<sup>4</sup>

## Physical

length 72 mm

width 72 mm

height 75 mm

0.46 kg


## Cutout

diameter 60 mm


recessed depth 85 mm

Square semi-recessed spotlight made of aluminium; surface black (housing/light inset); luminaire housing can be attached to mounting plate without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 44° beam; UGR ≤ 19; degree of protection IP40; PC2 220-240V; incl. converter, non dimmable; external converter for ceiling insertion, through-wiring suitable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

## Installation instructions



## Lighting calculator

