

# SASSO 60 square downlight

trim 2 lamps

048-2612911S 048-2699317 002-90742



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

black , RAL9005 <sup>1</sup>

Mounting set traffic white

front IP44 , back IP20

926 lm

## LED

2700 K

CRI ≥ 90

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 87

MR 0.52

MDER 0.47

## Optical

spot

beam angle 12°

UGR < 13

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM

system 20.8 W

inset 8.8 W

36 Vf

250 mA

total insets 17.7 W

PC2 220-240V

system 45 lm/W<sup>3</sup>

inset 52 lm/W<sup>4</sup>

## Physical

trim

length 147 mm

width 81 mm

height 48 mm

0.28 kg

## Cutout

length 138 mm

width 73 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 90 mm




Recessed square spotlight in die-cast aluminium; 2 lamps; surface black; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 12° beam; UGR ≤ 13; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

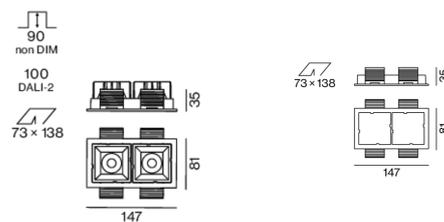

[048-2612911S 048-2699317 002-90742] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

2111.2024

1 / 2

# SASSO 60 square downlight

trim 2 lamps

048-2612911S 048-2699317 002-90742



Project / Type

---

Notes

---

Count / Date

---

**Installation  
instructions**



**Lighting  
calculator**

