

# SASSO 60 square downlight

trim 2 lamps

048-2612914W 048-2699317 002-90742



Project / Type

Notes

Count / Date



220-240V

IP20  
IP44

X-PERT

X-PERT

### General

Ceiling , Recessed

matt silver

Mounting set traffic white

front IP44 , back IP20

1820 lm

### LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 87

MR 0.52

MDER 0.47

### Optical

wide flood

beam angle 52°


≥65° <1500 cd/m<sup>2</sup>

PstLM ≤ 1.0 <sup>1</sup>


SVM ≤ 0.4 <sup>1</sup>

Recessed square spotlight in die-cast aluminium; 2 lamps; surface matt silver; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 52° beam; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

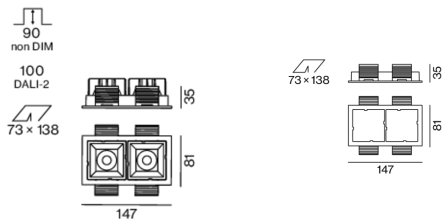

### Electrical

non DIM

system 20.5 W

inset 8.7 W

36 Vf

250 mA

total insets 17.4 W

PC2 220-240V

system 89 lm/W<sup>2</sup>

inset 105 lm/W<sup>3</sup>

### Physical

trim

length 147 mm

width 81 mm

height 48 mm

0.28 kg

### Cutout

length 138 mm

width 73 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 90 mm

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>3</sup> incl. optical losses



# SASSO 60 square downlight

trim 2 lamps

048-2612914W 048-2699317 002-90742



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator



# SASSO 60 square downlight

trim 2 lamps  
048-2612914W 048-2699317 002-90742



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000            | 40 000                          | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF               | 0.964                        | 0.923  | 0.884             | 0.847                           | 0.811  |
| LSF                | 1                            | 1      | 1                 | 1                               | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> | Room Surface Maintenance Factor |        |
| MF                 | Maintenance Factor           |        | LLMF              | Lamp Lumens Maintenance Factor  |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF               | Lamp Survival Faktor            |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 57                 |
| B13                            | 75                 |
| B16                            | 92                 |
| B20                            | 115                |
| C10                            | 57                 |
| C13                            | 75                 |
| C16                            | 92                 |
| C20                            | 115                |

## Components

### MOUNTING SET with trim 2 lamps

|                           |               |            |                   |
|---------------------------|---------------|------------|-------------------|
| TYPE                      | COLOUR        | L-W-H (MM) | ARTICLE NUMBER(S) |
| for intermediate ceilings | traffic white | 147-81-35  | 048-2699317       |



### POWER SUPPLY

|      |            |                   |
|------|------------|-------------------|
| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
| 10 W | 65-39-20   | 002-90742         |



## Mounting accessories

### THROUGH WIRING CONNECTION BOX

|                           |            |                   |
|---------------------------|------------|-------------------|
| TYPE                      | L-W-H (MM) | ARTICLE NUMBER(S) |
| non DIM cable ø 4 – 12 mm | 105-58-30  | 005-253110        |
| DALI cable ø 4 – 12 mm    | 105-58-30  | 005-255110        |



## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

|                 |             |                   |
|-----------------|-------------|-------------------|
| COLOUR          | L-W-H (MM)  | ARTICLE NUMBER(S) |
| white aluminium | 614-307-120 | 048-2695110       |



## Optional electrical accessories

### DIN RAIL POWER SUPPLY

|       |            |                   |
|-------|------------|-------------------|
| TYPE  | L-W-H (MM) | ARTICLE NUMBER(S) |
| 160 W | 72-90-63   | 005-6520210       |



### DIN RAIL LED DRIVER

|                                |            |                   |
|--------------------------------|------------|-------------------|
| TYPE                           | L-W-H (MM) | ARTICLE NUMBER(S) |
| DALI-2   200-1050 mA   2 x 42W | 36-88-59   | 005-6121030       |

