

SASSO 60 square downlight

trim

048-2612114S 048-2697317 002-90742



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

matt silver

Mounting set traffic white

front IP44 , back IP20

976 lm

fixture 90 lm/W¹

LED

4000 K

CRI ≥ 90

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_f: 90 , R_{t(1-15)}: 88

MR 0.8

MDER 0.72

Optical

spot

beam angle 15°

UGR ≤ 16 , $\geq 65^\circ < 1500$ cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

220-240 V

system 12.8 W

fixture 10.9 W

36 Vf

300 mA

PC2

Physical

trim

length 80 mm

width 80 mm

height 48 mm

0.24 kg

Cutout

length 73 mm

width 73 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 60 mm


¹ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

² Value of containing product at full load (undimmed)

Light distribution



Product drawing

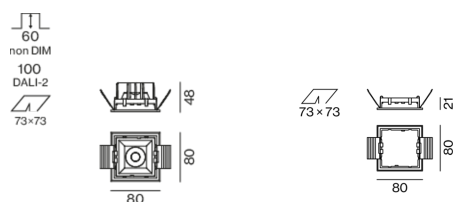

Installation instructions



Lighting calculator



[048-2612114S 048-2697317 002-90742] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

08.04.2025

1 / 1