

SASSO 60 round downlight

trim 2 lamps

048-2602117F 048-2698318 002-90742



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

white , RAL9016 ¹

Mounting set jet black

front IP44 , back IP20

1910 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88

MR 0.8

MDER 0.72

Optical

flood

beam angle 46°

UGR < 19 , ≥65° <1500 cd/m²

P_{st}LM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

system 20.1 W

inset 8.5 W

36 Vf

250 mA

total insets 17.1 W

PC2 220-240V

system 95 lm/W³

inset 112 lm/W⁴

Physical

trim

length 147 mm

width 80 mm

height 48 mm

0.28 kg

Cutout

diameter 70 mm


length 70 mm

width 136 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 90 mm

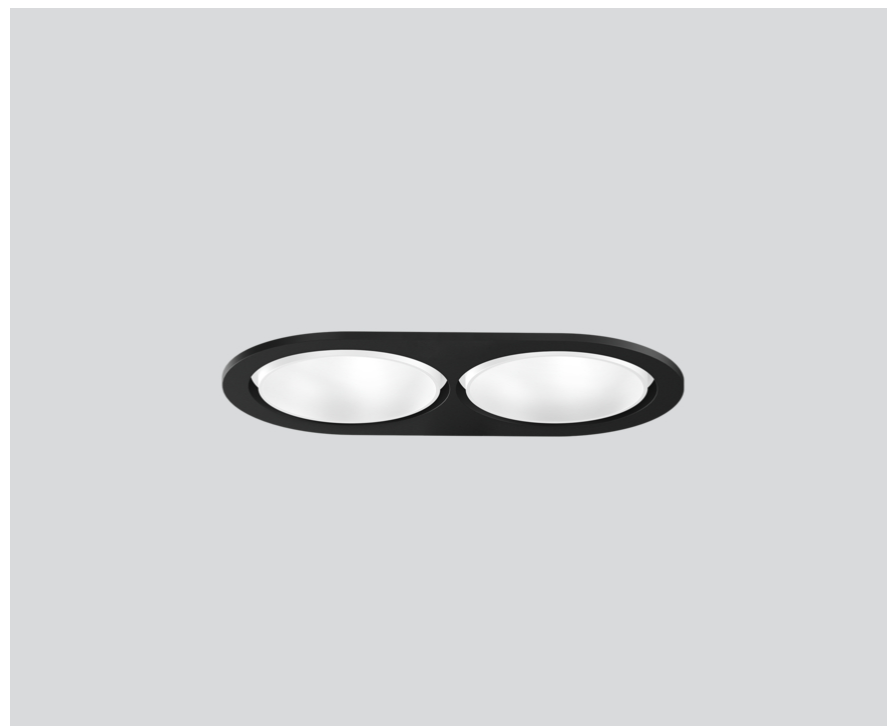


Round recessed spotlight in die-cast aluminium; 2 lamps; surface white; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 46° beam; UGR ≤ 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

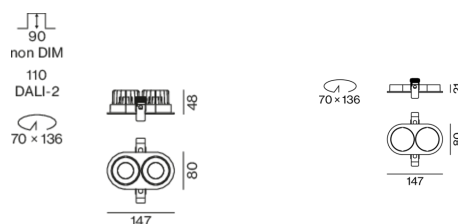

[048-2602117F 048-2698318 002-90742] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

24.11.2024

1 / 3

SASSO 60 round downlight

trim 2 lamps

048-2602117F 048-2698318 002-90742



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator



SASSO 60 round downlight

trim 2 lamps

048-2602117F 048-2698318 002-90742



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.964 | 0.923 | 0.884 | 0.847 | 0.811 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Faktor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 57 |
| B13 | 75 |
| B16 | 92 |
| B20 | 115 |
| C10 | 57 |
| C13 | 75 |
| C16 | 92 |
| C20 | 115 |

Components

MOUNTING SET with trim 2 lamps

| | | | |
|-----------------------------------|---------------------|-------------------------|----------------------------------|
| TYPE for intermediate ceilings | COLOUR jet black | L-W-H (MM) 147-80-21 | ARTICLE NUMBER(S) 048-2698318 |
|-----------------------------------|---------------------|-------------------------|----------------------------------|



POWER SUPPLY

| | | |
|--------------|------------------------|--------------------------------|
| TYPE 10 W | L-W-H (MM) 65-39-20 | ARTICLE NUMBER(S) 002-90742 |
|--------------|------------------------|--------------------------------|



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| | | |
|---------------------------|---------------------------|----------------------------------|
| COLOUR white aluminium | L-W-H (MM) 614-307-120 | ARTICLE NUMBER(S) 048-2695110 |
|---------------------------|---------------------------|----------------------------------|



Optional electrical accessories

DIN RAIL POWER SUPPLY

| | | |
|---------------|------------------------|----------------------------------|
| TYPE 160 W | L-W-H (MM) 72-90-63 | ARTICLE NUMBER(S) 005-6520210 |
|---------------|------------------------|----------------------------------|



DIN RAIL LED DRIVER

| | | |
|--|------------------------|----------------------------------|
| TYPE DALI-2 200-1050 mA 2 x 42W | L-W-H (MM) 36-88-59 | ARTICLE NUMBER(S) 005-6121030 |
|--|------------------------|----------------------------------|

