

# SASSO 60 square downlight

trimless

048-2612214W 048-2697117 002-90746



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

matt silver

Mounting set traffic white

front IP44 , back IP20

967 lm

## LED

3500 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 2$  SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.7

MDER 0.64

## Optical

wide flood

beam angle 52°

$\geq 65^\circ < 1500 \text{ cd/m}^2$

PstLM  $\leq 1.0$ <sup>1</sup>

SVM  $\leq 0.4$ <sup>1</sup>

## Electrical

DALI-2

system 10.2 W

inset 8.7 W

36 V<sub>f</sub>

250 mA

PC2 220-240V

system 95 lm/W<sup>2</sup>

inset 111 lm/W<sup>3</sup>

1 DALI Addr.

## Physical

trimless

length 72 mm

width 72 mm

height 48 mm

0.28 kg

## Cutout

length 73 mm

width 73 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 105 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 52° beam; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

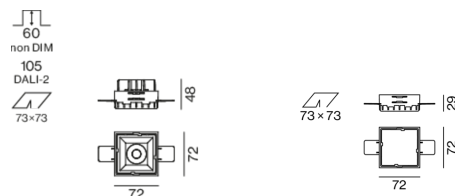

[048-2612214W 048-2697117 002-90746] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

23.11.2024

1 / 2

# SASSO 60 square downlight

trimless

048-2612214W 048-2697117 002-90746



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

