

SASSO 60 round downlight

trim 2 lamps

048-2602117F 048-269831G 002-90746



Project / Type
Notes
Count / Date



--	--	--	--	--

General

Ceiling , Recessed
rotation 360°
white , RAL9016 ¹
Mounting set white aluminium
front IP44 , back IP20
1910 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 98 , R _f : 90 , R ₍₁₋₁₅₎ : 88
MR 0.8
MDER 0.72

Optical

flood
beam angle 46°
UGR < 19 , ≥65° <1500 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Round recessed spotlight in die-cast aluminium; 2 lamps; surface white; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 46° beam; UGR ≤ 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical

DALI-2
system 20.1 W
inset 8.5 W
36 Vf
250 mA
total insets 17.1 W
PC2 220-240V
system 95 lm/W ³
inset 112 lm/W ⁴
1 DALI Addr.

Physical


trim
length 147 mm
width 80 mm
height 48 mm
0.34 kg

Cutout


diameter 70 mm
length 70 mm
width 136 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Light distribution



Product drawing

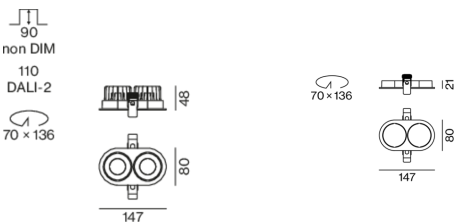

SASSO 60 round downlight

trim 2 lamps

048-2602117F 048-269831G 002-90746



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

