

SASSO 60 round downlight

trim 2 lamps


048-2602114F 048-2698318 002-90746



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

matt silver

Mounting set jet black

front IP44 , back IP20

1960 lm

LED

4000 K

CRI \geq 90

L80 / 50000 h

initial MacAdam \leq 2 SDCM

R_g: 98 , R_f: 90 , R_{f(1-15)}: 88

MR 0.8

MDER 0.72

Optical

flood

beam angle 42°

UGR < 19 , \geq 65° <1500 cd/m²

P_{stLM} \leq 1.0¹

SVM \leq 0.4¹

Electrical

DALI-2

system 20.1 W

inset 8.5 W

36 Vf

250 mA

total insets 17.1 W

PC2 220-240V

system 98 lm/W²

inset 115 lm/W³

1 DALI Addr.

Physical

trim

length 147 mm

width 80 mm

height 48 mm

0.34 kg

Cutout

diameter 70 mm

length 70 mm

width 136 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 110 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam \leq 2 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 42° beam; UGR \leq 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° \leq 1500 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

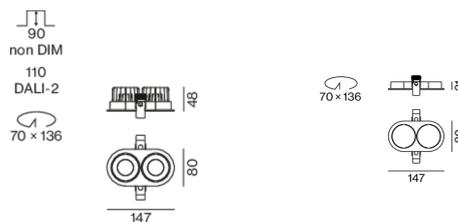

¹ Value of containing product at full load (undimmed)

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses



SASSO 60 round downlight

trim 2 lamps

048-2602114F 048-2698318 002-90746



Project / Type

Notes

Count / Date

**Installation
instructions**



**Lighting
calculator**

