

SASSO 100 round adjustable


trimless exposed concrete

048-2720111W 048-2795210 002-90766




Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 60° beam; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

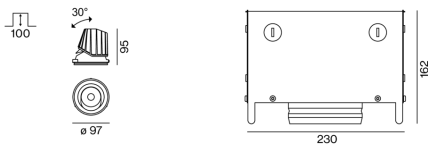

Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
tilt max 30°
rotation 360°
black , RAL9005 ¹
Mounting set white aluminium
front IP40 , back IP20
1740 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 98 , R_r: 90 , R_{t(1-15)}: 88
MR 0.8
MDER 0.72

Optical

wide flood
beam angle 60°
 $\geq 65^\circ < 1500 \text{ cd/m}^2$
P_{stLM} ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
system 17.9 W
inset 15.2 W
36 Vf
450 mA
PC2 220-240V
system 97 lm/W³
inset 114 lm/W⁴

Physical

trimless for exposed concrete ceiling
length 230 mm
width 230 mm
height 162 mm
2.6 kg

Cutout

recessed depth 100 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

