

SASSO 100 square downlight

trimless

048-2710219W 048-2797117 002-90766



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
gold , RAL260-M ¹
Mounting set traffic white
front IP44 , back IP20
1790 lm

LED

3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
 $R_g: 99$, $R_f: 90$, $R_{f(1-15)}: 89$
MR 0.7
MDER 0.64

Optical

wide flood
beam angle 65°
 $\geq 65^\circ < 1500 \text{ cd/m}^2$
 $\text{PstLM} \leq 1.0$ ²
 $\text{SVM} \leq 0.4$ ²

Electrical

non DIM
system 17.9 W
inset 15.2 W
36 Vf
450 mA
PC2 220-240V
system 100 lm/W³
inset 117 lm/W⁴

Physical


trimless
length 105 mm
width 105 mm
height 75 mm
0.49 kg

Cutout


length 106 mm
width 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface gold; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 65° beam; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

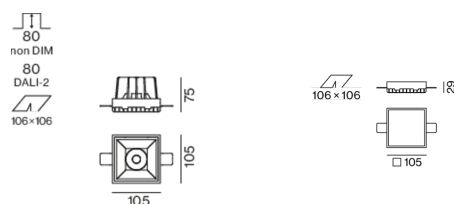

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

SASSO 100 square downlight

trimless

048-2710219W 048-2797117 002-90766



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

