

# SASSO 100 square downlight

trim 2 lamps

048-2710219F 048-279931G 002-90766



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

gold , RAL260-M<sup>1</sup>

Mounting set white aluminium

front IP44 , back IP20

3460 lm

## LED

3500 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 2$  SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.7

MDER 0.64

## Optical

flood

beam angle 45°


UGR  $< 16$  ,  $\geq 65^\circ < 1500$  cd/m<sup>2</sup>

PstLM  $\leq 1.0$ <sup>2</sup>


SVM  $\leq 0.4$ <sup>2</sup>

Recessed square spotlight in die-cast aluminium; 2 lamps; surface gold; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 45° beam; UGR  $\leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 1500$  cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

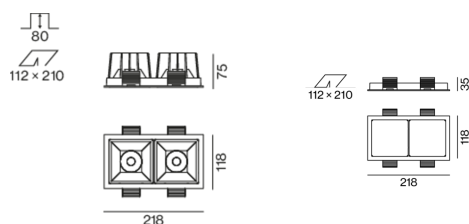

## Electrical

non DIM

system 35 W

inset 15.2 W

36 V<sub>f</sub>

450 mA

total insets 30 W

PC2 220-240V

system 99 lm/W<sup>3</sup>

inset 114 lm/W<sup>4</sup>

## Physical

trim

length 218 mm

width 118 mm

height 75 mm

0.57 kg

## Cutout

length 210 mm

width 112 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 100 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

# SASSO 100 square downlight

trim 2 lamps

048-2710219F 048-279931G 002-90766



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

