

# SASSO 100 square downlight

trim

048-2710211M 048-2797318 002-90780



Project / Type

Notes

Count / Date



220-240V

IP20  
IP44

X-PERT

X-PERT

## General

Ceiling , Recessed

black , RAL9005 <sup>1</sup>

Mounting set jet black

front IP44 , back IP20

2030 lm

## LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.7

MDER 0.64

## Optical

medium

beam angle 33°x34°

UGR < 16 , ≥65° <3000 cd/m<sup>2</sup>

## Electrical

non DIM

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 76 lm/W<sup>2</sup>

inset 90 lm/W<sup>3</sup>

## Physical

trim

length 118 mm

width 118 mm

height 75 mm

0.49 kg

## Cutout

length 112 mm

width 112 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33°x34° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

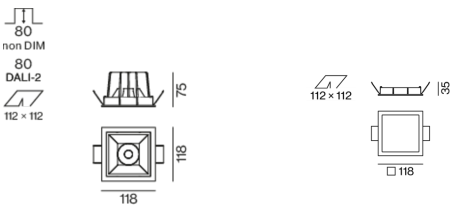

<sup>1</sup> RAL code

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>3</sup> incl. optical losses

## Installation instructions



## Lighting calculator

