

# SASSO 100 round downlight

trimless exposed concrete

048-2700919W 048-2795210 002-90780



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

rotation 360°

gold , RAL260-M<sup>1</sup>

Mounting set white aluminium

front IP44 , back IP20

2250 lm

## LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 87

MR 0.52

MDER 0.47

## Optical

wide flood

beam angle 66°

≥65° <1500 cd/m<sup>2</sup>

## Electrical

non DIM

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 84 lm/W<sup>2</sup>

inset 99 lm/W<sup>3</sup>

## Physical

trimless for exposed concrete ceiling

length 230 mm

width 230 mm

height 162 mm


2.58 kg

## Cutout


recessed depth 80 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 66° beam; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

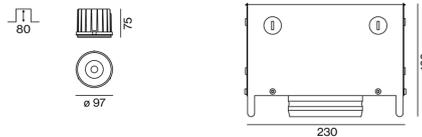

<sup>1</sup> RAL code

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>3</sup> incl. optical losses

## Installation instructions



## Lighting calculator

