

# SASSO 60 emergency light

## pro trimless soft acoustic ceiling

048-2693231 048-2696197



Project / Type

Notes

Count / Date



**General**

Ceiling , Recessed

rotation 360°

black , RAL 9005 <sup>1</sup>

Mounting set signal white for acoustic ceilings

IP20

206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm

**LED**

6500 K

CRI ≥ 80

**Optical**

emergency light

beam angle 21°<sup>2</sup>, 103°x25°<sup>3</sup>, 149°x150°<sup>4</sup>

**Electrical**

220-240 V

system 1.0 W

system 206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm/W<sup>5</sup>

PC2

Round LED emergency light inset; surface lacquered in black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; signal white for acoustic ceilings; for trimless installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; Pro DALI with monitoring via DALI; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

**Physical**


trimless for acoustic ceiling

diameter 80 mm


height 94 mm

0.32 kg

### Light distribution

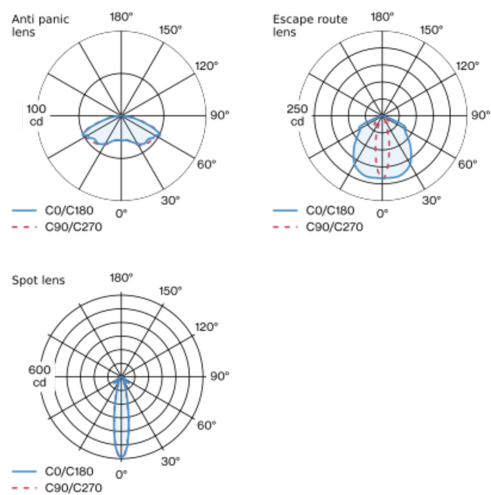

### Product drawing



**Cutout**

diameter 74 mm

min. ceiling thickness 25 mm

max. ceiling thickness 40 mm

recessed depth 110 mm

<sup>1</sup> RAL code <sup>2</sup> Spot lens <sup>3</sup> Escape route lens <sup>4</sup> Anti panic lens  
<sup>5</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

### Installation instructions

### Lighting calculator



# SASSO 60 emergency light

## pro trimless soft acoustic ceiling

048-2693231 048-2696197



Project / Type

Notes

Count / Date

### Components

#### MOUNTING SET trimless for soft acoustic ceilings

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
signal white for acoustic ceilings	80	048-2696197



### Mounting accessories

#### MOUNTING TOOL

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
traffic black	77-77-35	048-2695918



### Electrical accessories

#### REPLACEMENT ACCUPACK

TYPE	ARTICLE NUMBER(S)
3h battery life	048-2693910

