

# SASSO 60 round wallwasher/floor trim soft acoustic ceiling


048-2641517W 048-2696397 002-90762



Project / Type

Notes

Count / Date

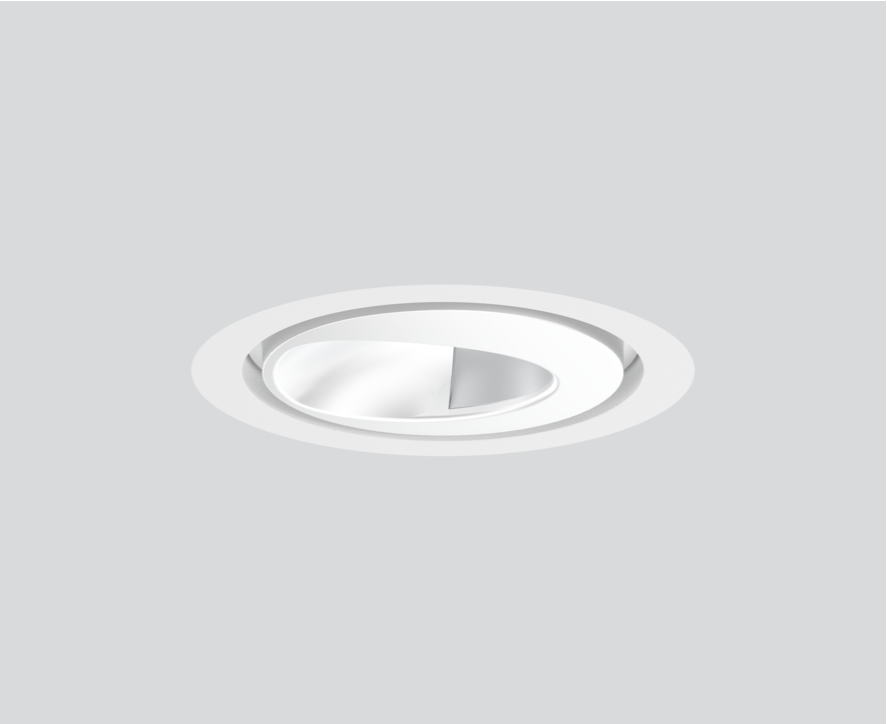

General

Ceiling , Recessed

rotation 360°

white , RAL9016 <sup>1</sup>

Mounting set signal white for acoustic ceilings

IP20

807 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>{1-15}</sub>: 89

MR 0.6

MDER 0.54

Optical

wallwasher floor

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

Electrical

DALI-2

220-240 V

system 9.7 W

inset 8.3 W

27 Vf

300 mA

PC2

system 83 lm/W<sup>3</sup>

inset 98 lm/W<sup>3</sup>

1 DALI Addr.

Physical

with trim for acoustic ceiling

diameter 80 mm

height 48 mm

0.27 kg

Cutout

diameter 74 mm

min. ceiling thickness 25 mm

max. ceiling thickness 40 mm

recessed depth 110 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface white; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim signal white for acoustic ceilings; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions



## Lighting calculator

