

SASSO 100 square downlight

trimless

048-2710114W 048-2797117 002-90767



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

matt silver

Mounting set traffic white

front IP44 , back IP20

1850 lm

LED

4000 K

CRI \geq 90

L80 / 50000 h

initial MacAdam \leq 2 SDCM

R_g: 98 , R_r: 90 , R_{t(1-15)}: 88

MR 0.8

MDER 0.72

Optical

wide flood

beam angle 65°

$\geq 65^\circ$ <1500 cd/m²

PstLM \leq 1.0 ¹

SVM \leq 0.4 ¹

Electrical

DALI-2

system 17.9 W

inset 15.2 W

36 V_f

450 mA

PC2 220-240V

system 103 lm/W²

inset 121 lm/W³

1 DALI Addr.

Physical

trimless

length 105 mm

width 105 mm

height 75 mm

0.52 kg

Cutout

length 106 mm

width 106 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam \leq 2 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 65° beam; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

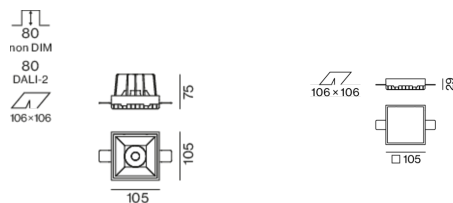

¹ Value of containing product at full load (undimmed)

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

SASSO 100 square downlight

trimless

048-2710114W 048-2797117 002-90767



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

