

SASSO 100 square downlight

trim 2 lamps

048-2710017F 048-2799318 002-90767



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

white , RAL9016 ¹

Mounting set jet black

front IP44 , back IP20

3460 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_r: 90 , R_{t(1-15)}: 87

MR 0.6

MDER 0.54

Optical

flood

beam angle 45°

UGR < 19

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 35 W

inset 15.2 W

36 V_f

450 mA

total insets 30 W

PC2 220-240V

system 99 lm/W³

inset 114 lm/W⁴

1 DALI Addr.

Physical

trim

length 218 mm

width 118 mm

height 75 mm

0.6 kg

Cutout

length 210 mm

width 112 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

¹ RAL code ² Value of containing product at full load (undimmed)


³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Light distribution



Product drawing

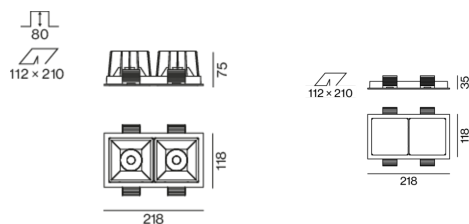

SASSO 100 square downlight

trim 2 lamps

048-2710017F 048-2799318 002-90767



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

