

SASSO 40 round adjustable

trim

048-2820411F 048-2896318 002-90753




Project / Type
Notes
Count / Date




Round recessed spotlight in die-cast aluminium; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 46° beam; UGR ≤ 16 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

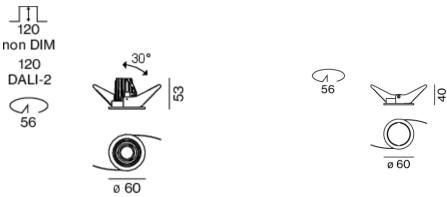

General

Ceiling , Recessed
tilt max 30°
rotation 360°
black , RAL 9005 ¹
Mounting set jet black
front IP40 , back IP20
358 lm
fixture 70 lm/W ²

LED

2700 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 91 , R _(f-15) : 89
MR 0.54
MDER 0.49

Optical

flood
beam angle 46°
UGR ≤ 16 , $\geq 65^\circ$ < 3000 cd/m ²
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical

DALI-2
220-240 V
system 6.2 W
fixture 5.1 W
12 Vf
450 mA
PC2

Physical

trim
diameter 60 mm
height 50 mm
0.2 kg

Cutout

diameter 56 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 120 mm

¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
³ Value of containing product at full load (undimmed)



SASSO 40 round adjustable

trim

048-2820411F 048-2896318 002-90753



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

