

# SASSO 60 square wallwasher/floor

trimless


048-2651911W 048-2697117 002-90762



Project / Type


Notes

Count / Date

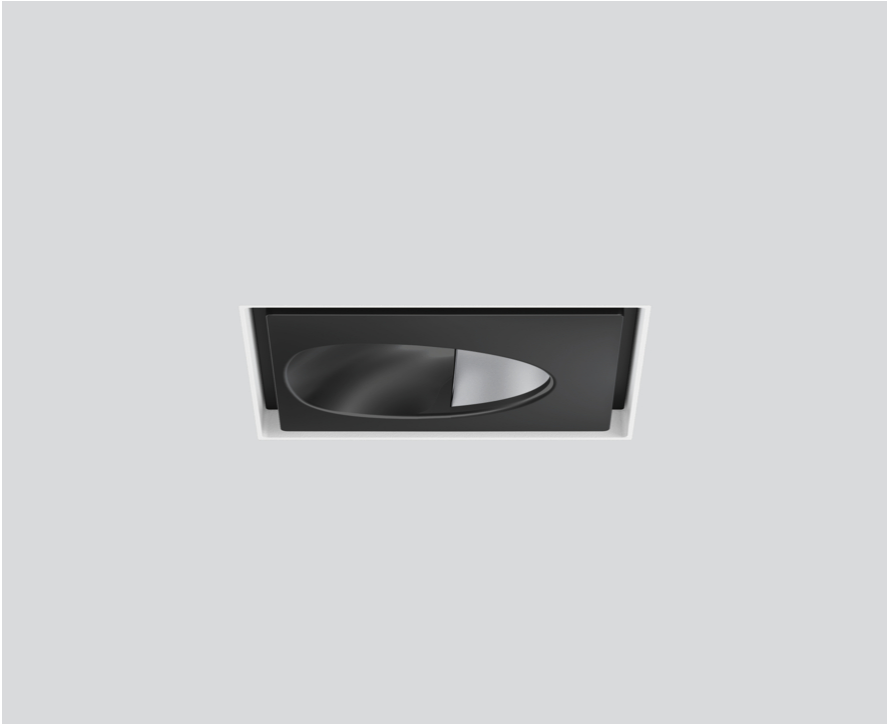


Recessed square spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

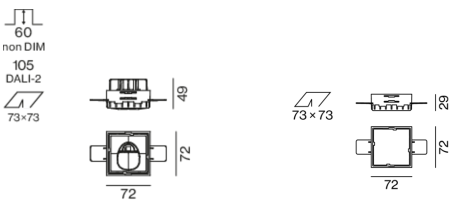

### General

Ceiling , Recessed

black , RAL 9005 <sup>1</sup>

Mounting set traffic white

IP20

992 lm

fixture 112 lm/W<sup>2</sup>

### LED

2700 K

CRI  $\geq 90$

L85 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 101 , R<sub>r</sub>: 90 , R<sub>f(1-15)</sub>: 88

MR 0.51

MDER 0.46

### Optical

wallwasher floor

PstLM  $\leq 1.0$  <sup>3</sup>

SVM  $\leq 0.4$  <sup>3</sup>

### Electrical

DALI-2

220-240 V

system 10.4 W

fixture 8.9 W

36 Vf

250 mA

PC2

1 DALI Addr.

### Physical

trimless

length 72 mm

width 72 mm

height 48 mm

0.28 kg

### Cutout

length 73 mm

width 73 mm

min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm

recessed depth 105 mm

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 60 square wallwasher/floor

trimless

048-2651911W 048-2697117 002-90762



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

