

# SASSO 60 round adjustable

trim 2 lamps

048-2622211S 048-2698317 002-90790



Project / Type


Notes

Count / Date




Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 15° beam; UGR ≤ 13; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

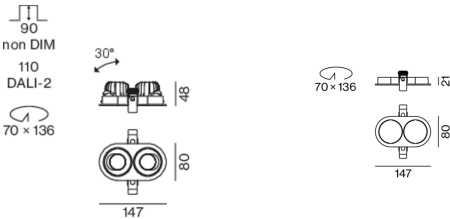

## General

Ceiling , Recessed  
tilt max 30°  
rotation 360°  
black , RAL 9005 <sup>1</sup>  
Mounting set traffic white  
front IP40 , back IP20  
1690 lm  
fixture 78 lm/W<sup>2</sup>

## LED

3500 K  
CRI ≥ 90  
initial MacAdam ≤ 2 SDCM  
R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 87  
MR 0.6  
MDER 0.54

## Optical

spot  
beam angle 15°  
UGR ≤ 13  
P<sub>stLM</sub> ≤ 1.0 <sup>3</sup>  
SVM ≤ 0.4 <sup>3</sup>

## Electrical

DALI-2  
220-240 V  
system 25.5 W  
fixture 10.9 W  
36 Vf  
300 mA  
fixture 21.7 W  
PC2  
1 DALI Addr.

## Physical

trim  
length 147 mm  
width 80 mm  
height 48 mm  
0.34 kg

## Cutout

diameter 70 mm  
length 70 mm  
width 136 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 110 mm

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 60 round adjustable

trim 2 lamps

048-2622211S 048-2698317 002-90790



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator



# SASSO 60 round adjustable

trim 2 lamps  
048-2622211S 048-2698317 002-90790



Project / Type

Notes

Count / Date

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B16	30
C10	23
C16	36

## Components

### MOUNTING SET with trim 2 lamps

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
for intermediate ceilings	traffic white	147-80-21	048-2698317



### POWER SUPPLY

ARTICLE NUMBER(S)
002-90790

## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	614-307-120	048-2695110



## Optional electrical accessories

### DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



### DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2   200-1050 mA   2 x 42W	36-88-59	005-6121030

