



BO 55/70

track


EN Track light made of die-cast aluminium; surface powder coated; spotlight head 355° rotatable and 90° tiltable; converter integrated in the power track adapter; high-quality, aluminium, vapour deposition coated reflector with faceted design; precise radiation characteristics with different beam angles; good glare reduction due to recessed light point plane; optical attachments as accessories; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; adapter for toolless insertion or movement on a variety of 3-phase power tracks

FR Spot sur rail en fonte d'aluminium injectée ; surface thermolaquée ; tête de spot rotatif à 355° et orientable à 90° ; convertisseur intégré à l'adaptateur du rail d'alimentation ; réflecteur de grande qualité, métallisée à l'aluminium avec optique facette ; précision de caractéristique de rayonnement avec divers angles de diffusion ; bon anti-éblouissement grâce aux points lumineux en retrait ; éléments optiques comme accessoires ; avec technologie COB (Chip on Board) pour efficacité maximale ; pas de formation d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; adaptateur pour installation ou déplacement sans outil dans différents rails triphasés

Quickinfo

3000K, 3500K, 4000K
CRI ≥ 90 2-SDCM
up to 98lm/W
L80 @ 50 000h
non DIM, DALI-2

Types

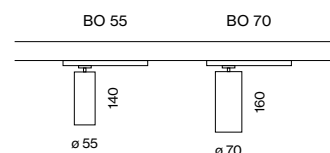

Colours



Light distributions

BO 55



BO 70




compatible with
MOVE IT PRO



355° rotatable,
90° tiltable



glare control via
honeycomb louver



CRI ≥ 90,
2 SDCM

Order options

COLOUR TEMPERATURE	
3000 K	5
3500 K	7
4000 K	6

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR	
○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE BO 55	
spot 17°	S
medium 30°	M
flood 38°	F

BEAM ANGLE BO 70	
spot 15°	S
medium 23°	M
flood 37°	F
wide flood 57°	W


Options on request

COLOUR RENDERING INDEX

CRI ≥ 95, 2 SDCM

CONTROL

Casambi

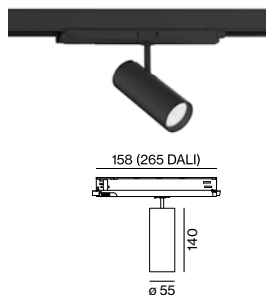

BO 55 track



TRACK LIGHT

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
22.3 W	2170 lm	180-7312

BO 70 track



TRACK LIGHT

SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
34.2 W	3150 lm	180-7411

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
BO 55	50.3	007-1965598
BO 70	61.3	080-5900018

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
BO 55	50.3	007-1965890

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
BO 55	50.3	007-1965990





WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
BO 55	50.3	007-1965790

LUMINOUS FLUX value calculated for
3000 K, CRI ≥ 90, colour white, flood
3500 K +2%, 4000 K +5%



Types

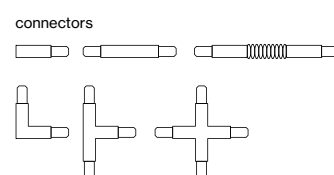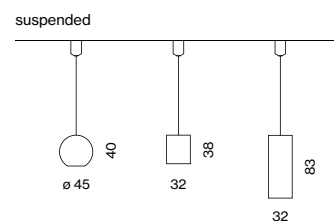

Colours



TRACK 3-phase

recessed/surface/suspended



curve
connector



optimised adapter
integration

TRACK recessed

Order options

CONTROL




non DIM

DALI-2

MATERIAL COLOUR

- pure white RAL 9010 7
- jet black RAL 9005 8

Pole options

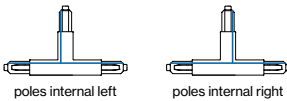

TRACK 3-phase/3-phase + DALI-2-bus



TRACK 240V-16A

L (mm)	ORDER CODE
2000	186-012213
3000	186-012313
4000	186-012413

end cap 186-022011

end feed left 186-022313
end feed right 186-022413
middle feed 186-021323

CONNECTORS 240V-16A

TYPE ORDER CODE
linear connector 186-021113

I-connector 186-022123


L-connector right 186-022133
L-connector left 186-022233

T-connector right (poles internal) 186-022143
T-connector left (poles internal) 186-022243
T-connector right (poles external) 186-022173
T-connector left (poles external) 186-022273

X-connector 186-022153

MOUNTING ACCESSORIES

TYPE ORDER CODE
clip 186-022511
cutting tool 186-021911

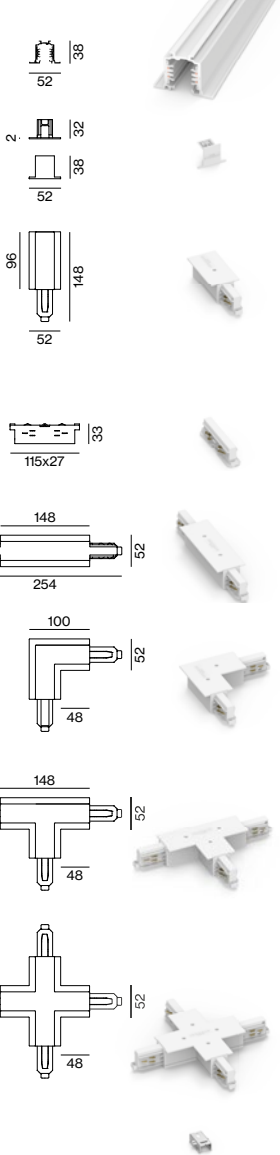

TRACK

surface/suspended

Order options

CONTROL




non DIM

DALI-2

MATERIAL COLOUR

○ pure white RAL 9010	7
● grey	6
● jet black RAL 9005	8

Pole options

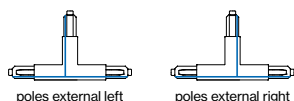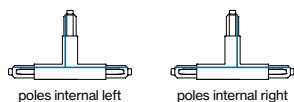

TRACK 3-phase/3-phase + DALI-2-bus



TRACK 240V-16A

L (mm)	ORDER CODE
1000	186-011123
2000	186-011223
3000	186-011323
4000	186-011423

end cap 186-021011

end feed left 186-021313

end feed right 186-021413

middle feed* 186-021323

*only available in white and black

CONNECTORS 240V-16A

TYPE	ORDER CODE
linear connector	186-021113

I-connector 186-021123

L-connector right 186-021133

L-connector left 186-021233

T-connector right (poles internal) 186-021143

T-connector left (poles internal) 186-021243

T-connector right (poles external) 186-021173

T-connector left (poles external) 186-021273

X-connector 186-021153

adjustable corner connector 186-021163

MOUNTING ACCESSORIES

TYPE	ORDER CODE
ceiling clip	186-021511

pendant clip cable 186-021521

pendant clip rod 186-021541

joiner piece cable 186-021531

joiner piece rod 186-021551

cutting tool 186-0219110


SUSPENSION KIT

TYPE	ORDER CODE
pendant 1000	186-021611

cable 1500 186-0217110

cable 3000 186-0217210

cable 5000 186-0217310

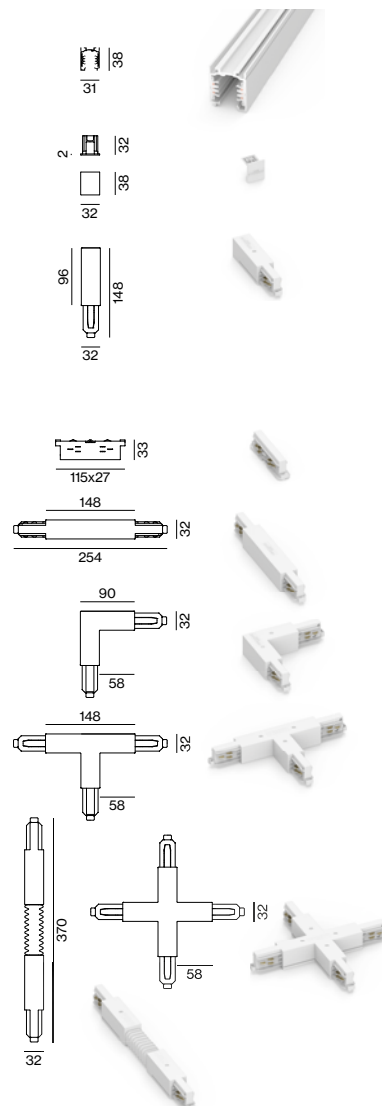

TRACK high

surface/suspended

Order options

CONTROL

non DIM

DALI-2

MATERIAL COLOUR



- pure white RAL 9010 7
- jet black RAL 9005 8

Options on request

LIGHT OPTIC COVER

inset indirect

Pole options

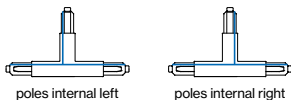

TRACK high 3-phase/3-phase + DALI-2-bus



TRACK 240V-16A

L (mm)	ORDER CODE
1000	186-016113
2000	186-016213
3000	186-016313
4000	186-016413
end cap	186-026011
end feed left	186-026313
end feed right	186-026413
middle feed	186-021323

CONNECTORS 240V-16A

TYPE	ORDER CODE
linear connector	186-026113
I-connector	186-026123
L-connector right	186-026133
L-connector left	186-026233
T-connector right (poles internal)	186-026143
T-connector left (poles internal)	186-026243
T-connector right (poles external)	186-026173
T-connector left (poles external)	186-026273

X-connector 186-026153

MOUNTING ACCESSORIES

TYPE	ORDER CODE
pendant clip cable	186-0265210
pendant sheet metal clip	186-0215220
pendant clip rod	186-0265410


joiner piece cable 186-0265310

joiner piece rod 186-0265510

cutting tool 186-0219110

SUSPENSION KIT

TYPE	ORDER CODE
pendant 1000	186-021611
cable 1500	186-0217110
cable 3000	186-0217210
cable 5000	186-0217310

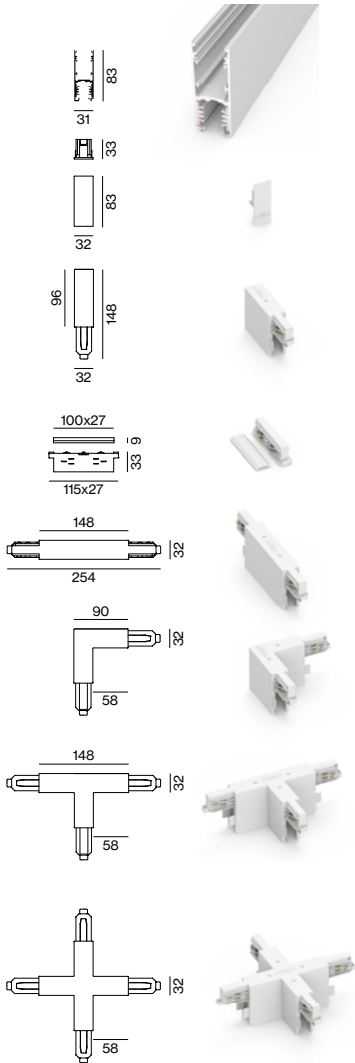

TRACK round

surface/suspended

Order options

CONTROL



non DIM

DALI-2

MATERIAL COLOUR

- pure white RAL 9010 7
- jet black RAL 9005 8

Pole options

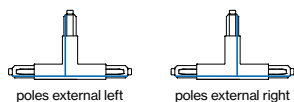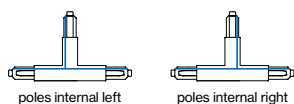

TRACK round 3-phase/3-phase + DALI-2-bus




TRACK 240V-16A

L (mm)	ORDER CODE
1000	186-015113
2000	186-015213
3000	186-015313
4000	186-015413



TRACK CURVE 240V-16A


TYPE	ORDER CODE
R 500 90° left	186-015853
R 500 90° right	186-015863



end cap	186-025011
---------	------------




end feed left	186-025313
end feed right	186-025413
middle feed	186-021323



CONNECTORS 240V-16A


TYPE	ORDER CODE
linear connector	186-021113



L-connector right (external)	186-025133
L-connector left (internal)	186-025233

T-connector left (poles external)	186-025243
T-connector right (poles external)	186-025143
T-connector right (poles internal)	186-025273
T-connector left (poles internal)	186-025173

X-connector	186-025153
-------------	------------



MOUNTING ACCESSORIES

TYPE	ORDER CODE
pendant clip cable	186-025521
pendant clip rod	186-025541

joiner piece cable	186-025531
joiner piece rod	186-025551

cutting tool	186-0279110
--------------	-------------

SUSPENSION KIT

TYPE	ORDER CODE
pendant 1000	186-021611
cable 1500	186-0217110
cable 3000	186-0217210
cable 5000	186-0217310