

MOVE IT 25/45 system

acoustic elements

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; different versions: choice of square, rectangular or triangular design (only MOVE IT 25); high quality visual and tactile surface with embossed pattern; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25/45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools

IT Elemento acustico in feltro prodotto con PET riciclato di alta qualità, autoportante e con proprietà fonoassorbenti; diverse versioni: forma a scelta tra quadrata, rettangolare o triangolare; superficie di alta qualità sia dal punto di vista ottico che tattile con motivo in rilievo; possibile presenza di fibre estranee; assorbimento del suono diretto e del suono riflesso dal soffitto; con elevata performance acustica; per l'inserimento nel sistema a sospensione MOVE IT 25/45 con giunti di snodo e profili disponibili; possibilità di inserimento successivo in un sistema a sospensione MOVE IT suspended system già installato; montaggio senza utensili


Quickinfo

PET felt


♻️ from recycled material
up to absorption class A

🔥 flame retardant version available


Types

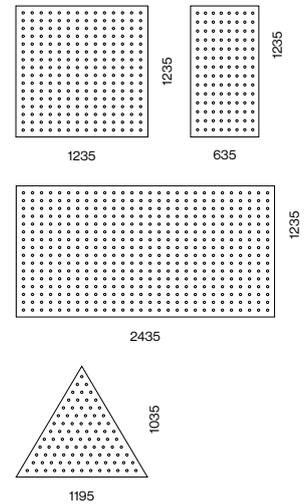


Acoustic colours



flat acoustic
inlay 25 mm



embossed
finish




quick and easy
to retrofit



sensor inset
available

Order options

ACOUSTIC COLOUR	
<input type="radio"/> white	W
<input type="radio"/> marble grey	D
<input type="radio"/> anthracite	B
<input type="radio"/> black	L
<input type="radio"/> limestone	S

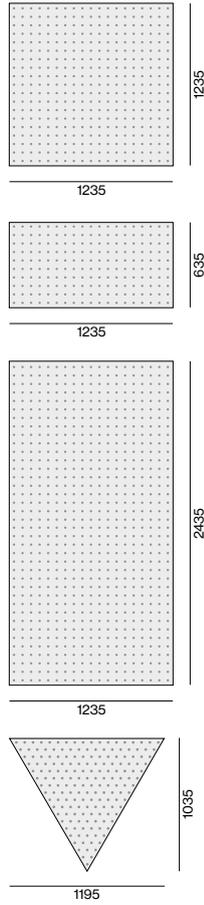

MOVE IT 25 / 45 acoustic suspended

A
B
C
D
E

1.30
NRC

1.32
SAA

ACOUSTIC ELEMENT

TYPE	L-W-H (mm)	ORDER CODE
square grid inlay	1235-1235-25	050-231121 <input checked="" type="checkbox"/>
half grid inlay	635-1235-25	050-231221 <input checked="" type="checkbox"/>
double grid inlay	2435-1235-25	050-231321 <input checked="" type="checkbox"/>
triangle inlay*	1195-1035-25	050-231421 <input checked="" type="checkbox"/>


mounting only in MOVE IT 25/45 system with NODE connector + track 620 mm, 1220 mm or 2420 mm; *only available for MOVE IT 25 system

Acoustic data

Equivalent sound absorption area (A_{eq})


TYPE	125	250	500	1000	2000	4000 Hz
square grid inlay	0.73	1.47	1.73	2.20	2.67	2.77
half grid inlay	0.57	0.83	0.93	1.27	1.57	1.57
double grid inlay	1.30	2.73	3.20	4.10	4.97	5.23
triangle inlay	0.33	0.57	0.73	0.97	1.27	1.33

Sound absorption coefficient (α_p)

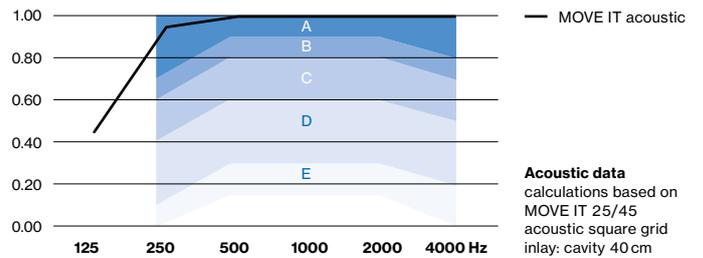


Configuration examples


MOVE IT 25 system

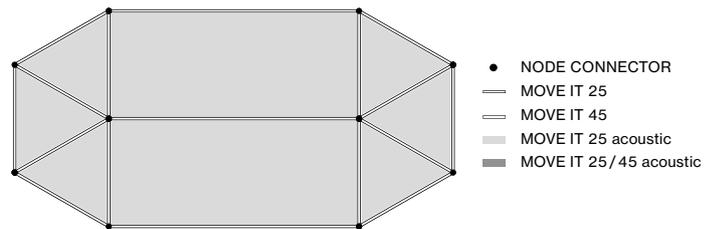

MOVE IT 45 system

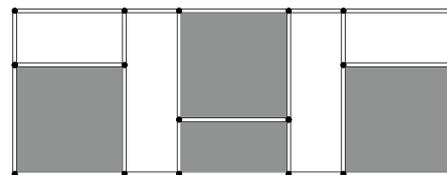

MOVE IT 25 / 45 system

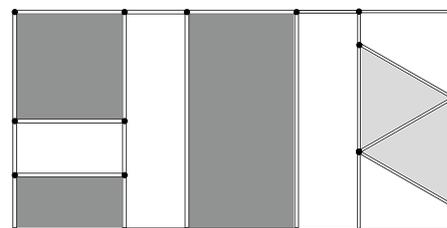

MOVE IT 25 system



MOVE IT 45 system